



CASK STEEL
A DIVISION OF CASK INDUSTRIES

CABLE MANAGEMENT SYSTEMS

Complete solutions for safe,
efficient and durable cable
management.



SAFE &
RELIABLE



STRONG &
DURABLE



EASY TO
INSTALL



COMPLETE
SOLUTIONS

CATALOGUE

2025





CASK STEEL CABLE MANAGEMENT SYSTEMS

CASK STEEL CABLE MANAGEMENT SYSTEMS is Turkish manufacturer with over 30 years of engineering experience

1. We supply a large variety of Cable Trays, Cable Ladders and Trunkings with their accessories encompassing a large spectrum of needs and design.
2. We are willing to accommodate other client's requirements not offered in our standard production, on a case by case basis.
3. We are geared for large size projects, for complete cable routing systems in terms of quality, speedy on time delivery and best value.
4. We conform to all European standards referring to definitions of cable trays, fittings, connectors and accessories.



CONTENTS

Types of Cable Containment	2
Materials and Finishes	3-8

Cable Trays	9 -15
Straight Section	
Horizontal Tee / Vertical Tee	
Horizontal Cross / Horizontal Elbow	
Reducer / Right Hand Reducer	
Left Hand Reducer / Inside Vertical Risers	
Outside Vertical Risers	

Cable Ladders	16 -30
Straight Section	
Horizontal Tee / Vertical Tee	
Horizontal Cross / Horizontal Elbow	
Reducer / Right Hand Reducer	
Left Hand Reducer / Inside Vertical Risers	
Outside Vertical Risers	

Cable Trunking.....	3 1 -34
Straight Section	
Horizontal Tee / Vertical Tee	
Horizontal Cross / Horizontal Elbow	
Reducer / Right Hand Reducer	
Left Hand Reducer / Inside Vertical Risers	
Outside Vertical Risers	

Cable Tray Covers.....	35-38
Straight Section	
Horizontal Tee / Vertical Tee	
Horizontal Cross / Horizontal Elbow	
Reducer / Right Hand Reducer	
Left Hand Reducer / Inside Vertical Risers	
Outside Vertical Risers	

Cable Tray Accessories	39-45
Channel	
Separator / Side Rail Clamp	
Joining Plate	
Bracket / Encap	
Hanger Post / Head Plate	
Threaded Rod	
Nuts and Bolts	

Types of Cable Containment

Cable Tray



Cable Ladder



Cable Trunking



Types of Cable Containment

Cable Tray

Constructed from single sheet of perforated metal. They are convenient for cables which require both a degree of protection from external damage and some ventilation.

Cable Ladder

Straight sections of ladder type cable trays consist of two longitudinal side rails, connected by individual transverse members, or rungs, which are welded to the side rails or bolted in case of GI trays.

This type of cable tray provides maximum ventilation to heat producing cable such as power cables.

Cable Trunking

Straight sections of solid bottom cable trays constructed from single sheet of metal, providing excellent protection from external damage. They are used primarily for intrumantal control, communication and other non-heat producing cables.



Materials and Finishes

CASK STEEL produces three types of Cable Management System

- Cable Tray
- Cable Ladder
- Cable Trunking

All of these are available with a full range of fittings and accessories.

FITTINGS

Fittings are sections of cable trays which are joined to other cable trays sections for the purpose of changing the direction, elevation or width of the cable run. All fittings are available in sizes and types corresponding to the straight cable tray sections.

Elbows - Horizontal and vertical elbows enable directional and elevational changes, respectively.
Horizontal Tee - These join cable tray sections in three directions at 90° angles.

Horizontal Cross - Same as "Tee" except in four directions at 90° angles.

Reducers - These join cable trays of different widths in the same plane.

COVERS

Covers act as an additional safeguard, providing shelter from sunlight dirt accumulation and accidental contact. They also isolate cables from fires and radio frequency interference.

Available in solid top or louvered top.

CONSTRUCTION ACCESSORIES

CASK STEEL all construction accessories to enable on site installation of cable tray systems. These include splice plate connectors, channels, clamps brackets and hangers.

SPECIFIC REQUIREMENTS

Other types of cable trays and fittings can be supplied to meet specific requirements.

All CASK STEEL cable trays are fabricated from Prime quality Sheet.

To provide adequate protection against corrosion, the types of protection are offered

- Electro powder coating
- Pre-galvanized
- Hot dip galvanized
- Aluminium

Material	Advantages
Aluminum	• Corrosion Resistance • Easy Field Fabrication & Installation • Excellent Strength to Weight Ratio • Excellent Grounding Conductor
Steel	• Electric Shielding • Finish Options • Low Thermal Expansion • Limited Deflection
Stainless Steel	• Superior Corrosion Resistance • Withstands High Temperatures

Finish	Recommended Use
Electrogalvanized Zinc	Indoor
Chromium Zinc	Indoor/Outdoor
Pre-Galvanized Zinc	Indoor
Hot Dip Galvanized Zinc After Fabrication	Indoor/Outdoor
Special Paint	Indoor

Materials and Finishes

Applications

- Chemical and purification plants.
- Offshore/onshore platforms.
- Power plants.
- Tunnels.
- Marine industry.
- Metallurgical plants.
- Oil & Gas sector.
- Water treatment plants.
- Paper industry.
- Mining.
- EM1/RFI testing.
- Building construction.
- Radar.
- Pollution control.

DIMENSIONS

CASK STEEL cable trays are manufactured in the following standard dimensions

- Length 2.500mm & 3.000mm
- Depth 50mm, 85mm, 100mm
- Width 100mm, 150mm, 300mm, 450mm, 600mm, 750mm, 900mm

■ Sheet Thickness

- 1.2mm for light loads
- 1.5mm for medium loads
- 2.0mm for heavy loads
- Upto 4.0mm for extra heavy loads

Elbow and Cross Radius

- 300mm (standard), 600mm & 900mm 1200mm also available


LOADING CAPABILITY & SUPPORT SPAN

All **CASK STEEL** cable trays are manufactured in accordance with the requirements of International Standard IEC 61537.







CableTray System

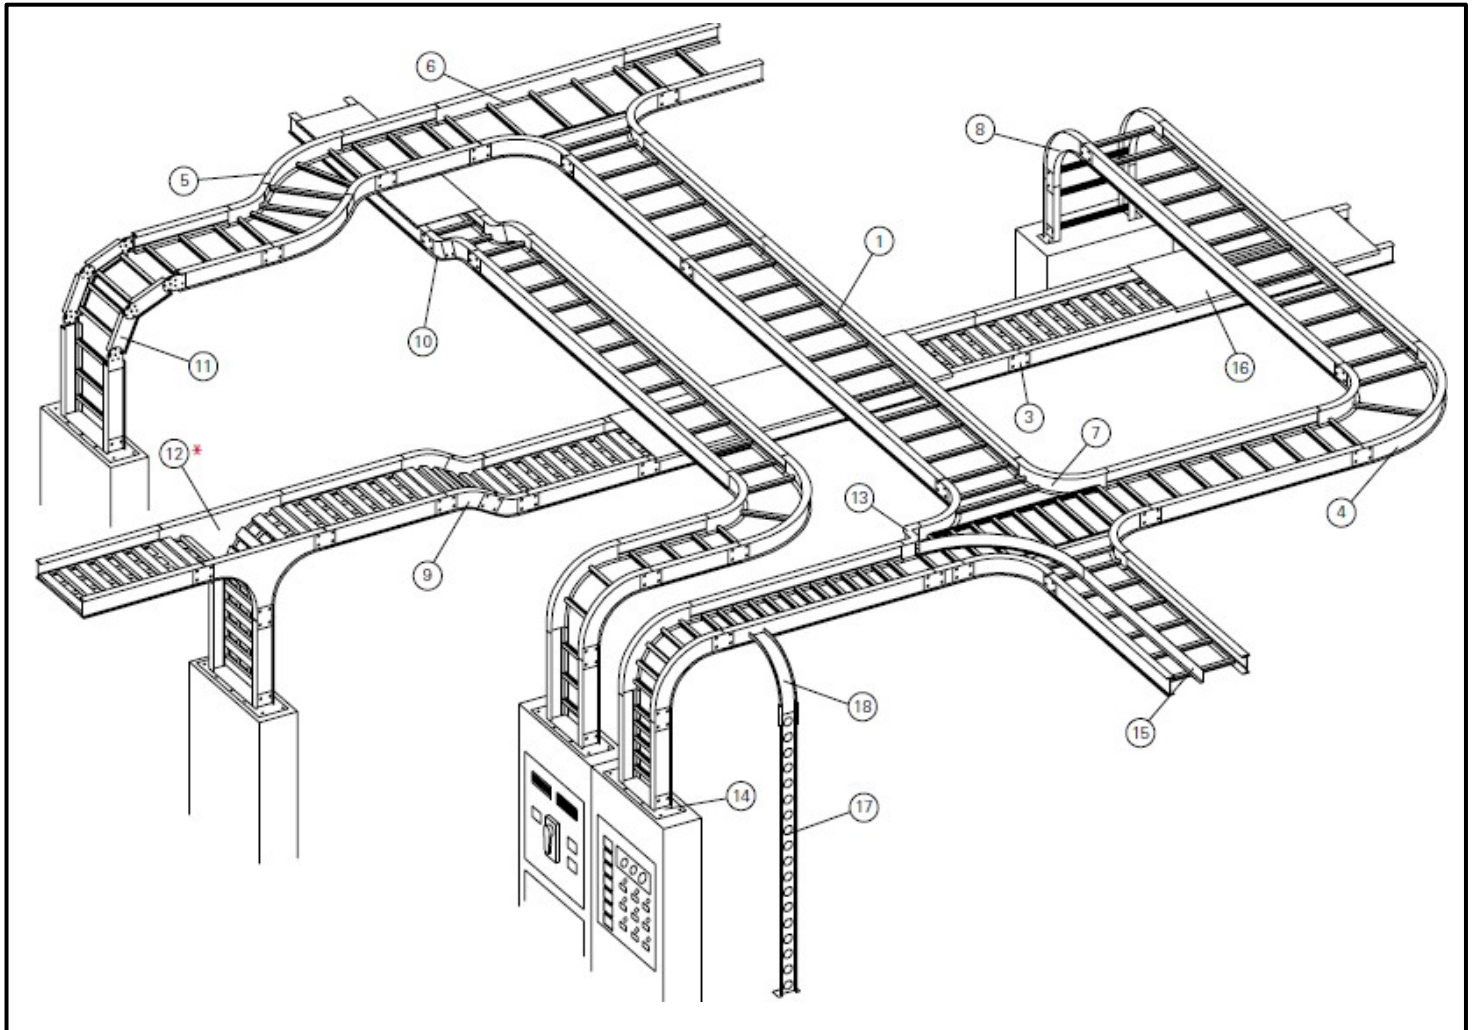

- | | |
|---|--|
| ① Ladder Type Cable Tray | ⑩ 30° Vertical Inside Bend, Ladder Type Cable Tray |
| ③ Straight Splice Plate | ⑪ Vertical Bend Segment (VBS) |
| ④ 90° Horizontal Bend, Ladder Type Cable Tray | ⑫ Vertical Tee Down |
| ⑤ 45° Horizontal Bend, Ladder Type Cable Tray | ⑬ Left Hand Reducer, Ladder Type Cable Tray |
| ⑥ Horizontal Tee, Ladder Type Cable Tray | ⑭ Frame Type Box Connector |
| ⑦ Horizontal Cross, Ladder Type Cable Tray | ⑮ Barrier Strip Straight Section |
| ⑧ 90° Vertical Outside Bend, Ladder Type Cable Tray | ⑯ Solid Flanged Tray Cover |
| ⑨ 45° Vertical Outside Bend, Ventiladed Type Cable Tray | ⑰ Ventiladed Channel Straight Section |
| | ⑱ Channel Cable Tray, 90° Vertical Outside Bend |

Cable Tray

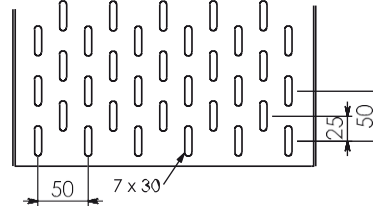


STANDARD DIMENSIONS


- Length (L) 2.500mm & 3.000mm
- Depth (D) 50mm, 75mm, 85mm, 100mm, 150mm
- Width (W) 100mm, 150mm, 200mm, 225mm, 300mm, 450mm, 600mm, 700mm, 800mm
- Sheet Metal Thickness
 - 1.2mm for light loads (LL)
 - 1.5mm for medium loads (M)
 - 2.0mm for heavy loads (H)

Designs other than those listed above can be manufactured to meet special requirements.


MDT25

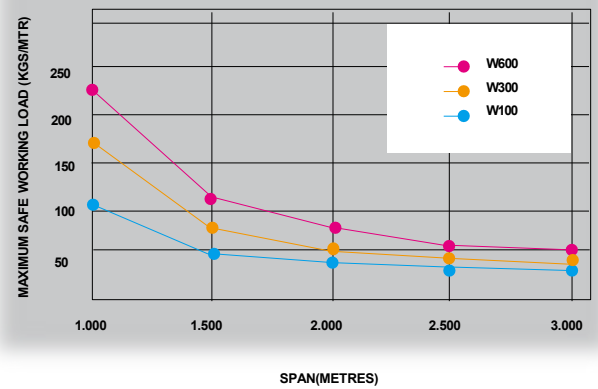


HDT50

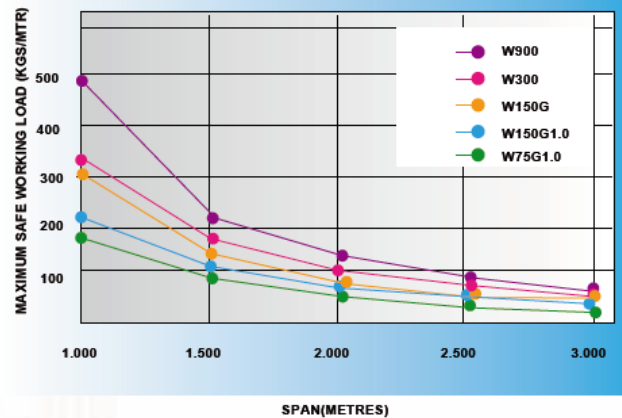


90° - Adjustable Vertical Riser

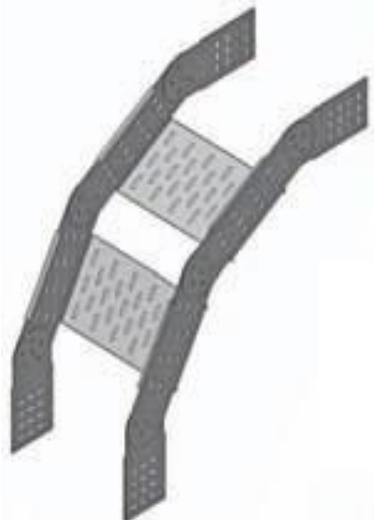


Width mm	Length mm	Thickness mm
100	25/50	1.2
150	25/50	1.2
225	25/50	1.2
300	25/50	1.2
400	25/50	1.5
600	25/50	1.5
800	25/50	2

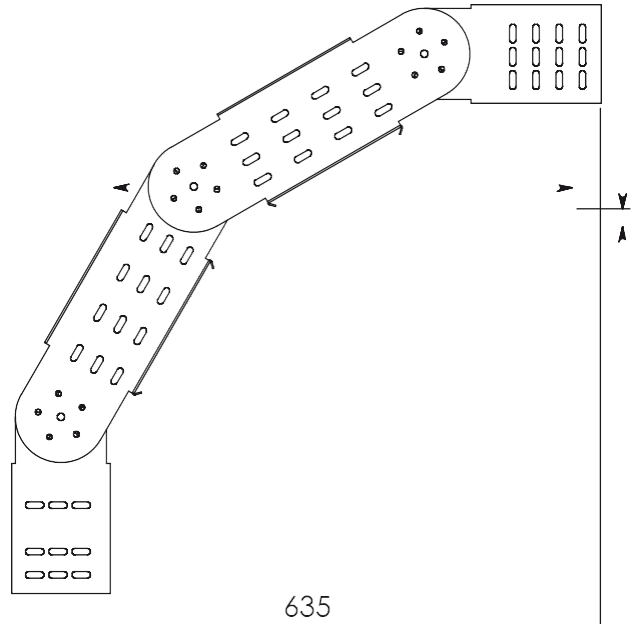

45° Bends

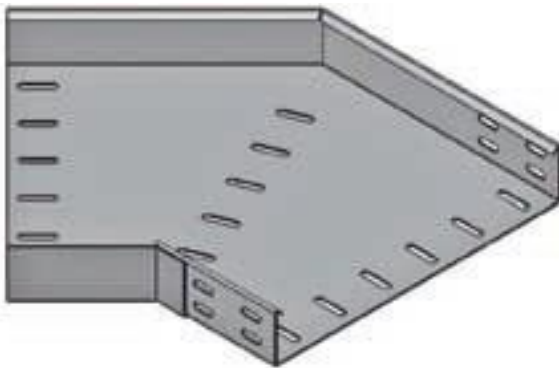


Width mm	Length mm	Thickness mm
100	25/50	1.2
150	25/50	1.2
225	25/50	1.2
300	25/50	1.2
400	25/50	1.5
600	25/50	1.5
800	25/50	2

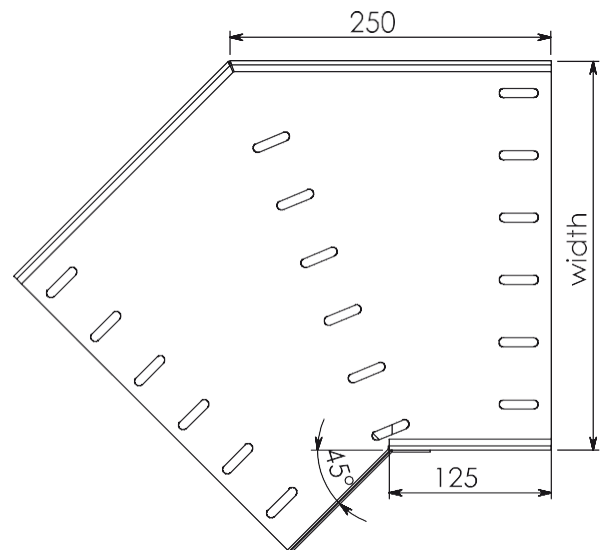

90° Bends




Width mm	Length mm	Thickness mm
100	25/50	1.2
150	25/50	1.2
225	25/50	1.2
300	25/50	1.2
400	25/50	1.5
600	25/50	1.5
800	25/50	2

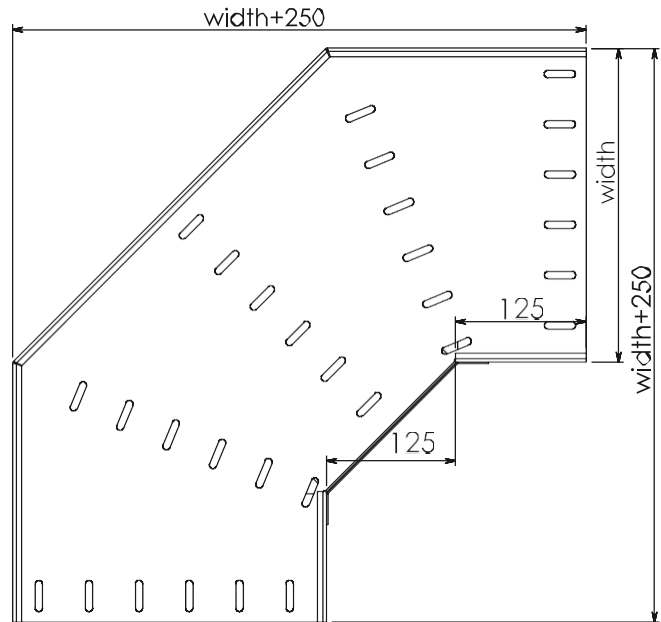


Tee Horizontal



Width mm	Length mm	Thickness mm
100	25/50	1.2
150	25/50	1.2
225	25/50	1.2
300	25/50	1.2
400	25/50	1.5
600	25/50	1.5
800	25/50	2

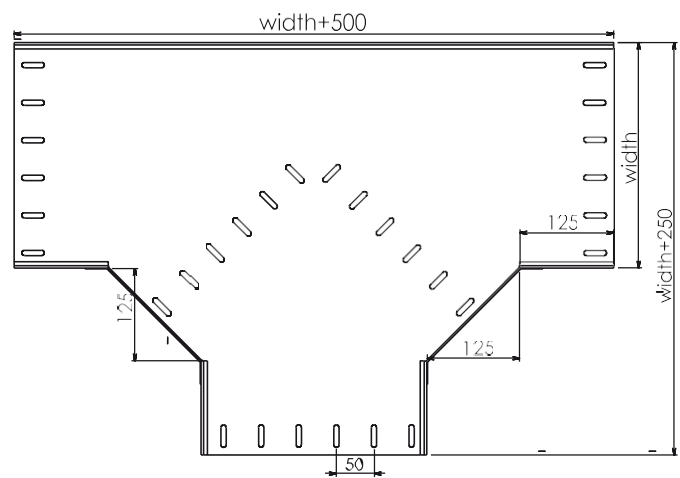


Cross Horizontal

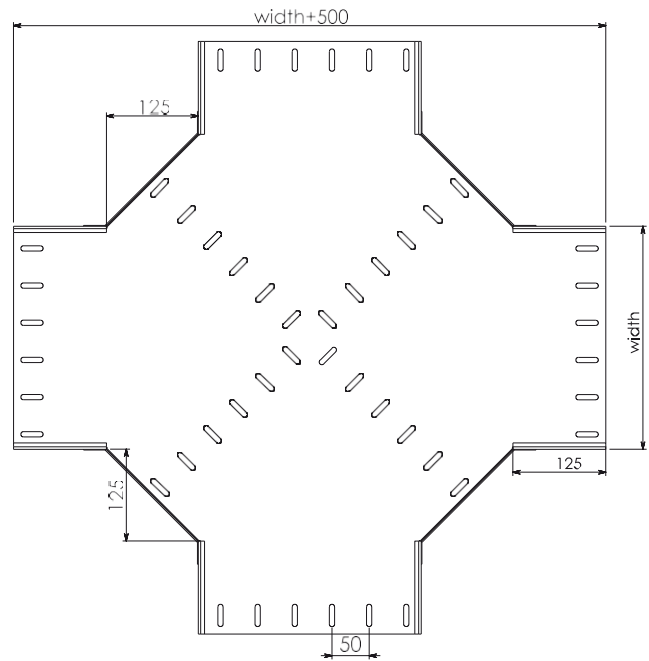

Width mm	Length mm	Thickness mm
100	25/50	1.2
150	25/50	1.2
225	25/50	1.2
300	25/50	1.2
400	25/50	1.5
600	25/50	1.5
800	25/50	2





Reducer (Straight, left, right)

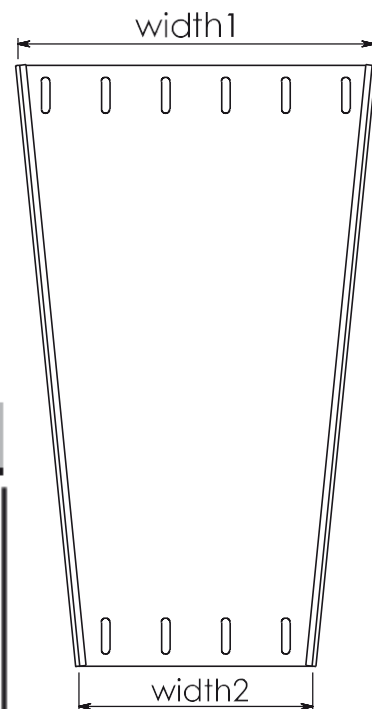

Width mm		Height mm	Thickness mm
Width 1	Width 2		
100	100	25/50	1.2
150	150	25/50	1.2
225	225	25/50	1.2
300	300	25/50	1.2
400	400	25/50	1.5
600	600	25/50	1.5






External Riser

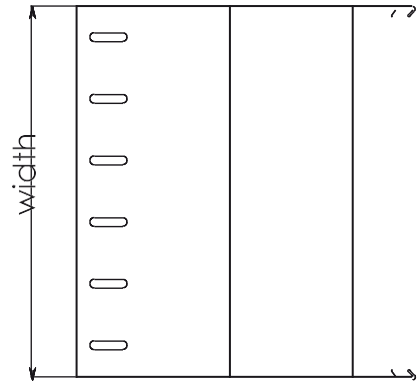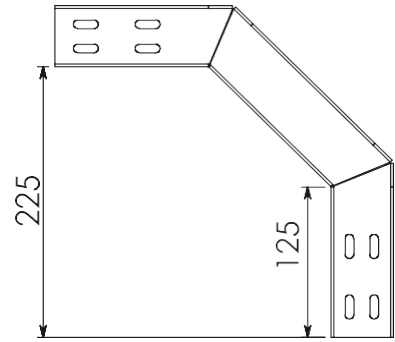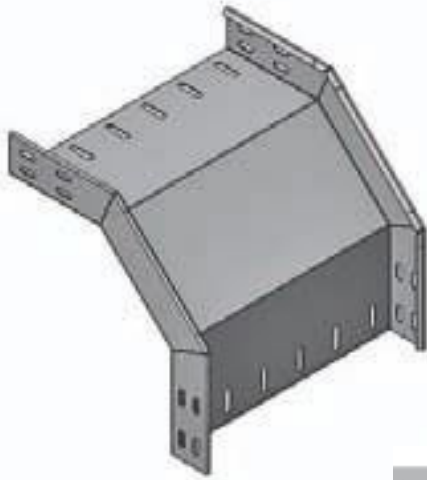


Width mm	Length mm	Thickness mm
100	25/50	1.2
150	25/50	1.2
225	25/50	1.2
300	25/50	1.2
400	25/50	1.5
600	25/50	1.5
800	25/50	2

Internal Riser

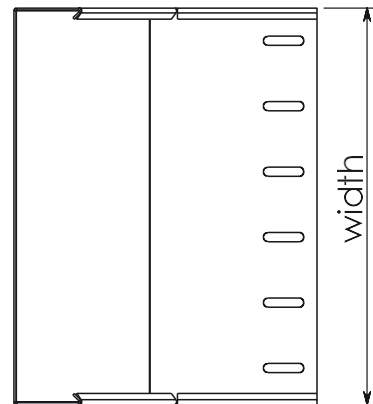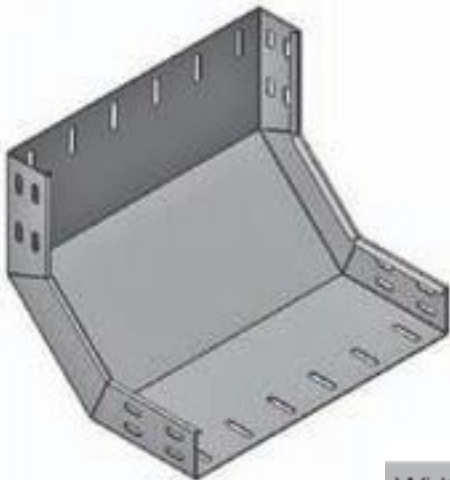

Width mm	Length mm	Thickness mm
100	25/50	1.2
150	25/50	1.2
225	25/50	1.2
300	25/50	1.2
400	25/50	1.5
600	25/50	1.5
800	25/50	2

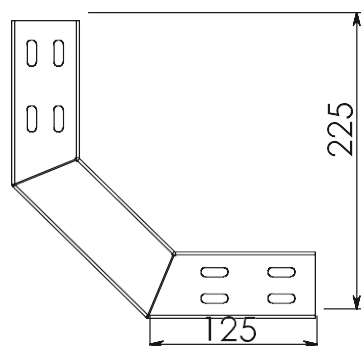







Cable Ladder System

6

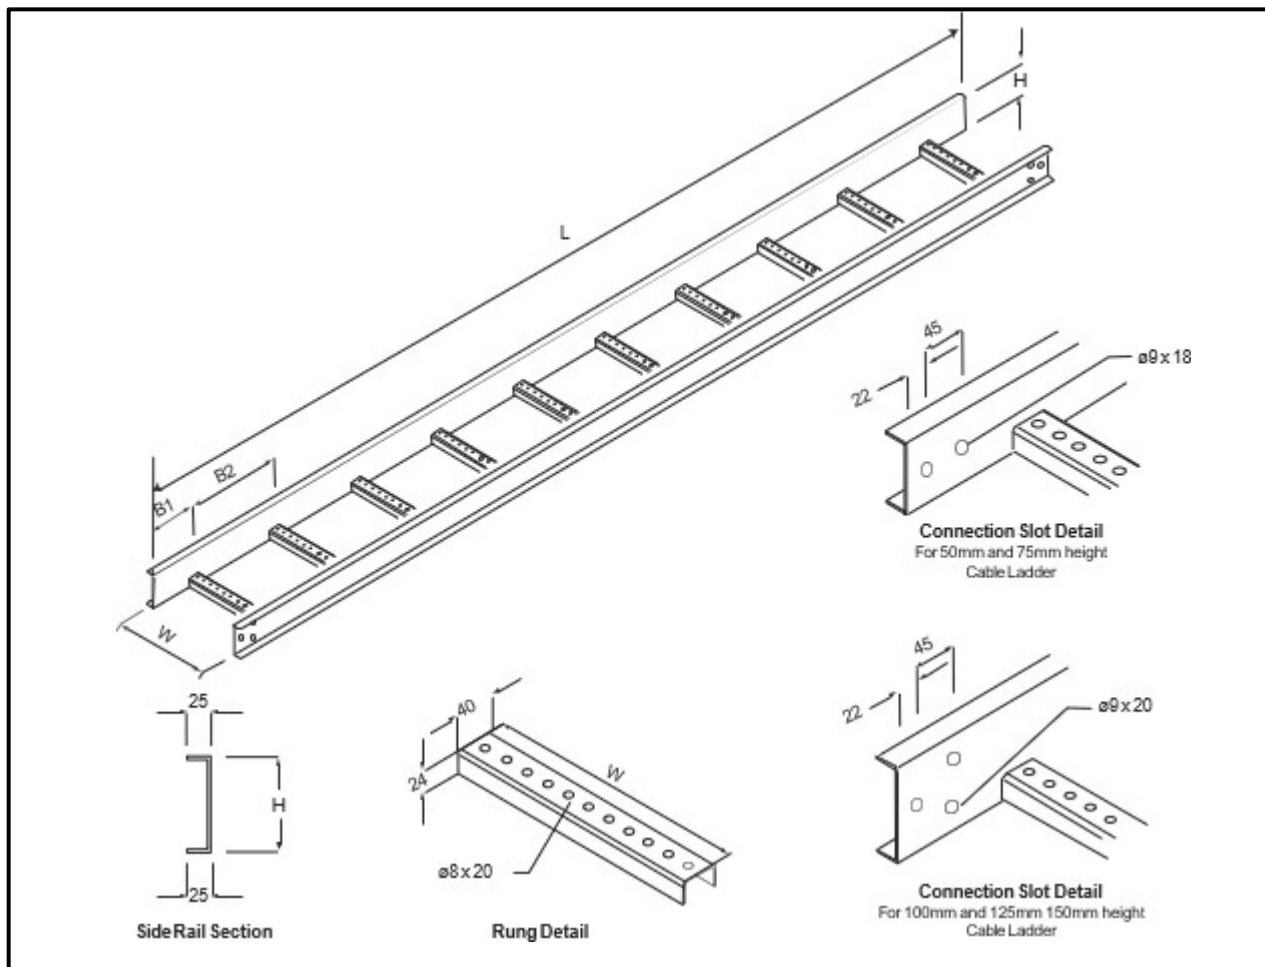

Straight Cable Ladder

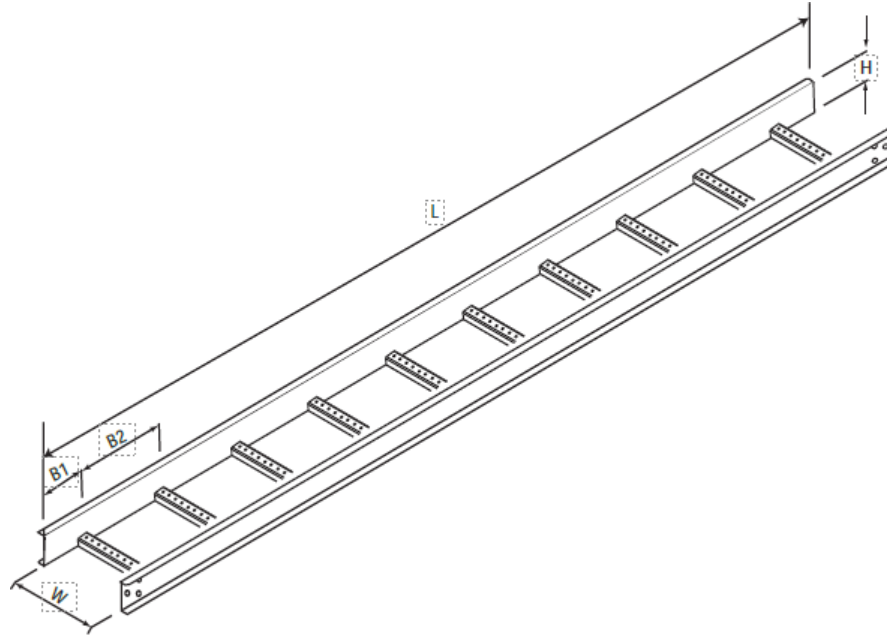

W	H	B1	B2	L	Thickness	Finish
150	50	150	300	3000	1.5	Hot Dip Galvanized - Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
200	50	150	300	3000	1.5	
250	50	150	300	3000	1.5	
300	50	150	300	3000	1.5	
150	75	150	300	3000	1.5	
200	75	150	300	3000	1.5	
250	75	150	300	3000	1.5	
300	75	150	300	3000	1.5	
150	100	150	300	3000	2.0	
200	100	150	300	3000	2.0	
250	100	150	300	3000	2.0	
300	100	150	300	3000	2.0	
400	100	150	300	3000	2.0	
450	100	150	300	3000	2.0	
500	100	150	300	3000	2.0	
600	100	150	300	3000	2.0	
750	100	150	300	3000	2.0	
900	100	150	300	3000	2.0	
1000	100	150	300	3000	2.0	
200	125	150	300	3000	2.0	

W	H	B1	B2	L	Thickness	Finish
250	125	150	300	3000	2.0	Hot Dip Galvanized - Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
300	125	150	300	3000	2.0	
400	125	150	300	3000	2.0	
450	125	150	300	3000	2.0	
500	125	150	300	3000	2.0	
600	125	150	300	3000	2.0	
750	125	150	300	3000	2.0	
900	125	150	300	3000	2.0	
1000	125	150	300	3000	2.0	
200	150	150	300	3000	2.0	
250	150	150	300	3000	2.0	
300	150	150	300	3000	2.0	
400	150	150	300	3000	2.0	
450	150	150	300	3000	2.0	
500	150	150	300	3000	2.0	
600	150	150	300	3000	2.0	
750	150	150	300	3000	2.0	
800	150	150	300	3000	2.0	
900	150	150	300	3000	2.0	
1000	150	150	300	3000	2.0	


Designs other than those listed above can be manufactured to meet special requirements.



Cerkesli mah Tavsancil sok no 72 Dilovasi-Kocaeli, Turkey
www.cask-industries.com



90° Bends

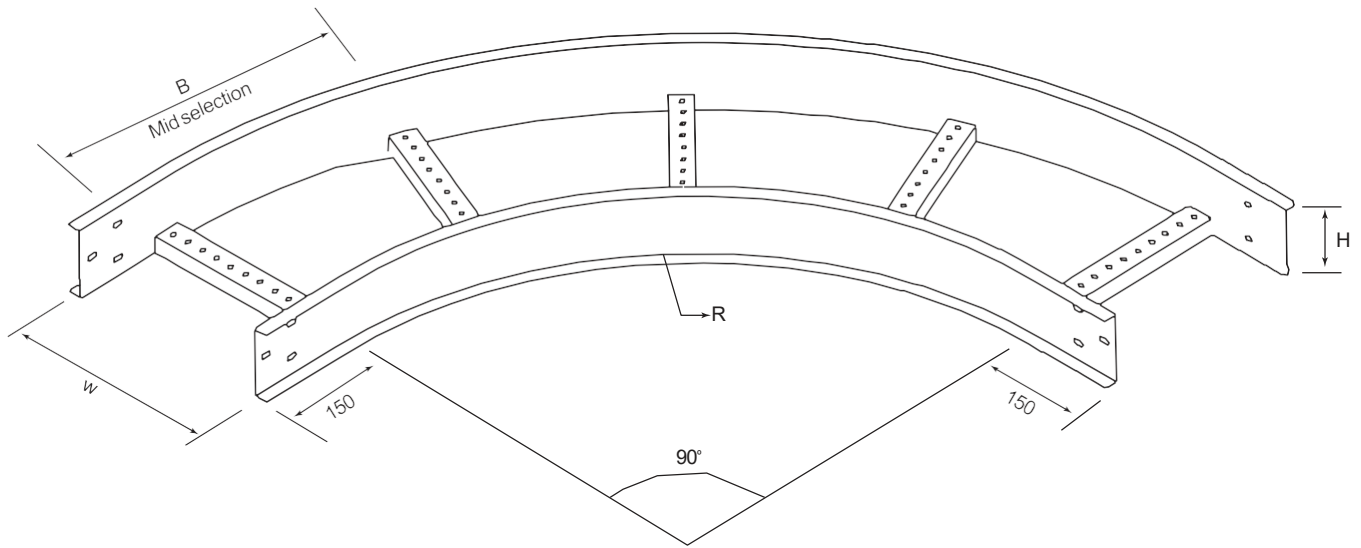

RungSpacing 300mm

W	H	Thickness	Radius	Finish
150	50	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanized - Epoxy or Polyester Coated - Stainless Steel & Aluminum Alloy
200	50			
250	50			
300	50			
150	75			
200	75			
250	75			
300	75			
150	100			
200	100			
250	100			
300	100			
400	100			
450	100			
500	100			
600	100			
750	100			
900	100			
1000	100			
200	125			

W	H	Thickness	Radius	Finish
250	125	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanized - Epoxy or Polyester Coated - Stainless Steel & Aluminum Alloy
300	125			
400	125			
450	125			
500	125			
600	125			
750	125			
900	125			
1000	125			
200	150			
250	150			
300	150			
400	150			
450	150			
500	150			
600	150			
750	150			
900	150			
1000	150			

Dimension in Millimeter

Abbreviation : BRungSpacing

Finish : HDG Hot Dip Galvanized
SSS Stainless Steel

H Height

PG Pre Galvanized
EP Epoxy Coated


R Radius

Al - Aluminum Alloy
PC - Polyester Coated

W - Width



45° Bends

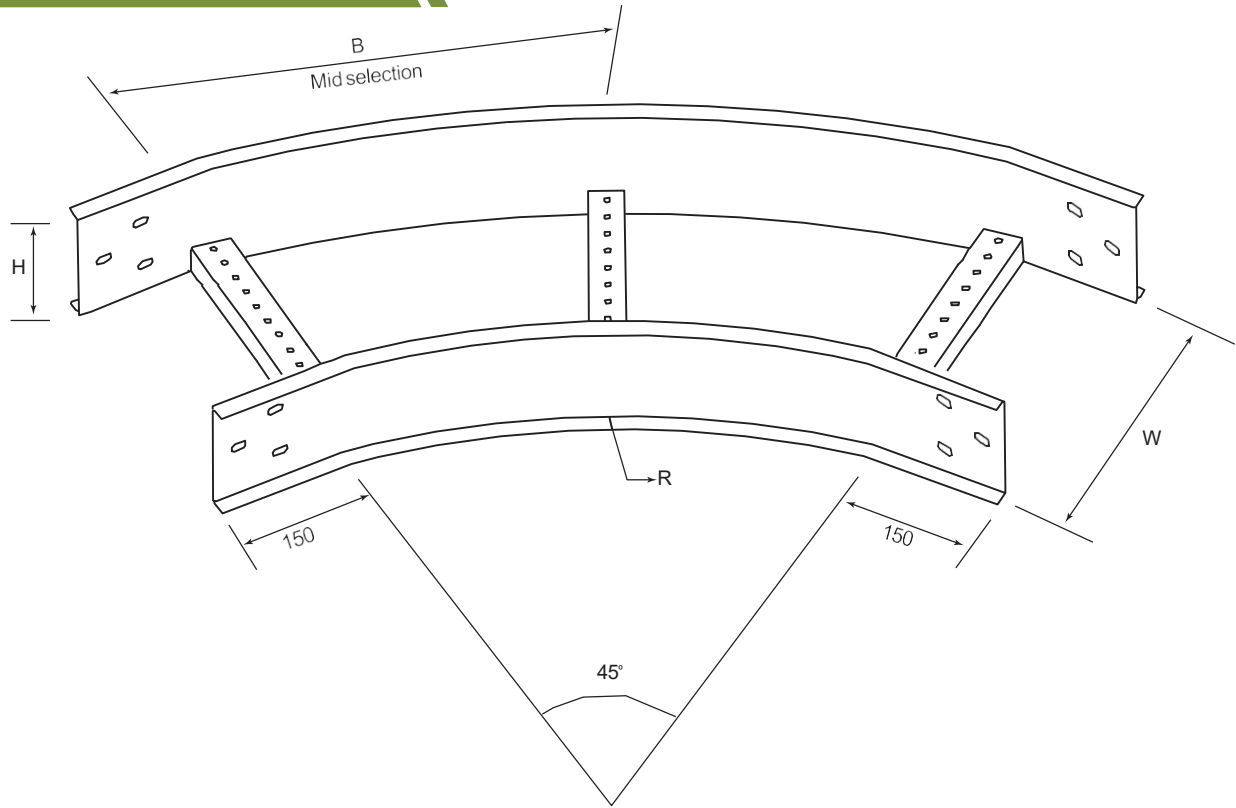

RungSpacing 300mm

W	H	Thickness	Radius	Finish
150	50	AsStraight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanized - Epoxy or Polyester Coated - Stainless Steel & Aluminum Alloy
200	50			
250	50			
300	50			
150	75			
200	75			
250	75			
300	75			
150	100			
200	100			
250	100			
300	100			
400	100			
450	100			
500	100			
600	100			
750	100			
900	100			
1000	100			
200	125			

W	H	Thickness	Radius	Finish
250	125	AsStraight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanized - Epoxy or Polyester Coated - Stainless Steel & Aluminum Alloy
300	125			
400	125			
450	125			
500	125			
600	125			
750	125			
900	125			
1000	125			
200	150			
250	150			
300	150			
400	150			
450	150			
500	150			
600	150			
750	150			
900	150			
1000	150			

Dimension in Millimeter

Abbreviation : BRungSpacing

Finish : HDG Hot Dip Galvanized
SS Stainless Steel

H Height

PG Pre Galvanized
EP Epoxy Coated


R Radius

Al - Aluminum Alloy
PC Polyester Coated

W Width



Horizontal Equal Tee

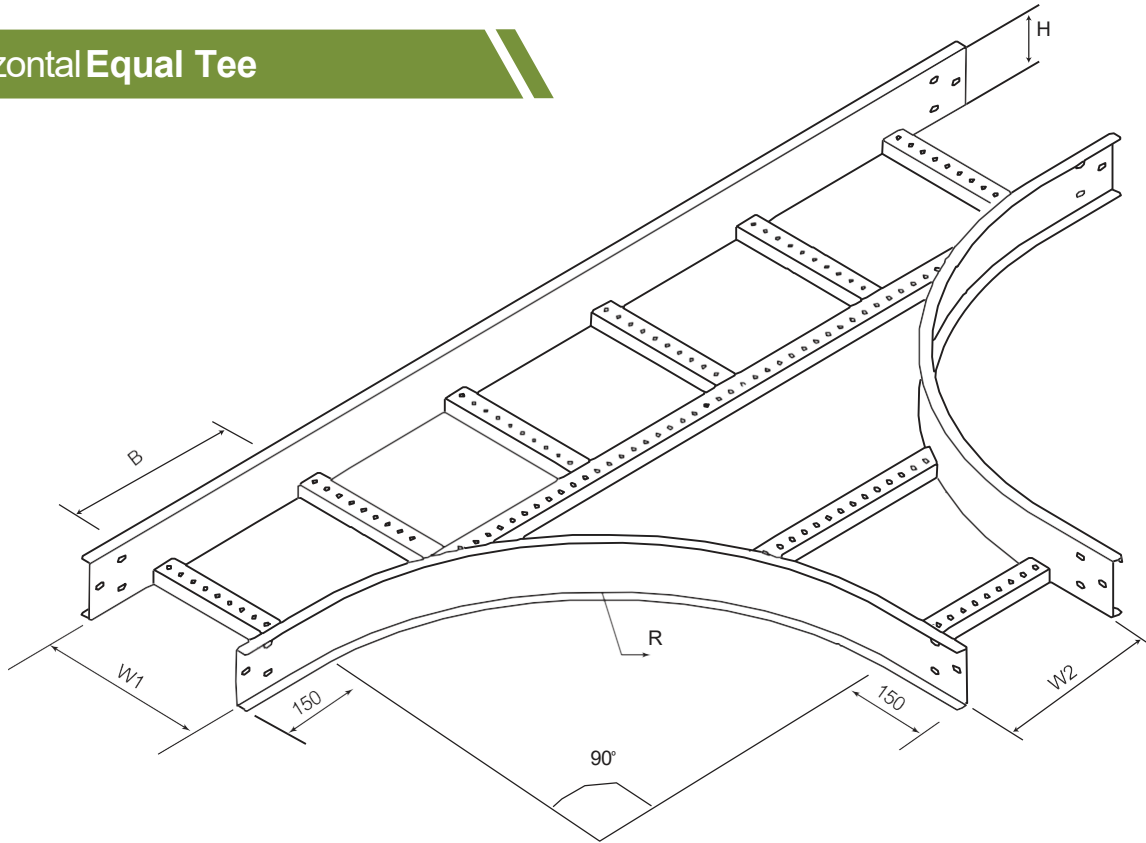

RungSpacing 300mm

W1	W2	H	Thickness	Radius	Finish
150	150	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized -Epoxy or PolyesterCoated -StainlessSteel &Aluminum Alloy
200	200	50			
250	250	50			
300	300	50			
150	150	75			
200	200	75			
250	250	75			
300	300	75			
150	150	100			
200	200	100			
250	250	100			
300	300	100			
400	400	100			
450	450	100			
500	500	100			
600	600	100			
750	750	100			
900	900	100			
1000	1000	100			
200	200	125			

W1	W2	H	Thickness	Radius	Finish
250	250	125	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized -Epoxy or PolyesterCoated -StainlessSteel &Aluminum Alloy
300	300	125			
400	400	125			
450	450	125			
500	500	125			
600	600	125			
750	750	125			
900	900	125			
1000	1000	125			
200	200	150			
250	250	150			
300	300	150			
400	400	150			
450	450	150			
500	500	150			
600	600	150			
750	750	150			
800	800	150			
900	900	150			
1000	1000	150			

Dimension in Millimeter

Abbreviation : BRungSpacing

HHHeight

RRadius

W-Width


Finish : HDGHot Dip Galvanized
SSStainlessSteel

PGPreGalvanized
EPEpoxyCoated

Al-Aluminum Alloy
PC-PolyesterCoated



Horizontal Unequal Tee

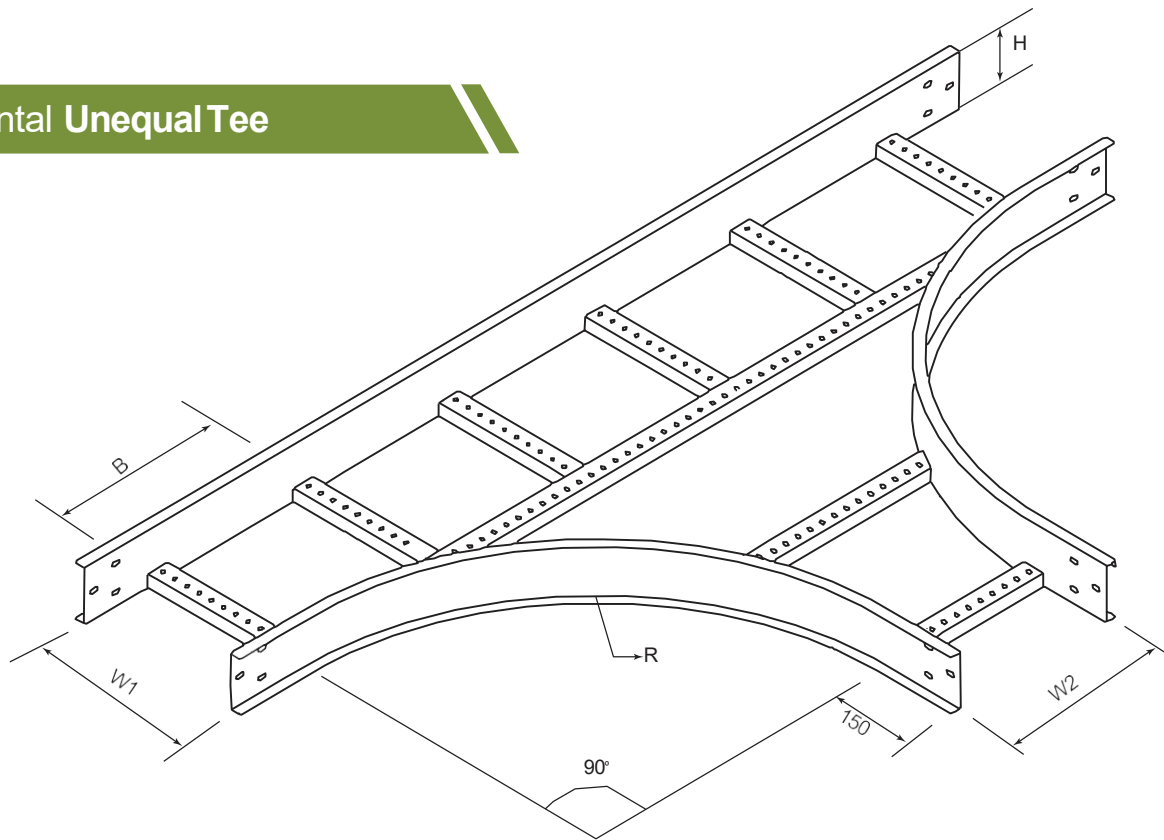

RungSpacing 300mm

W1	W2	H	Thickness	Radius	Finish
150	200 to 1000	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or Polyester Coated - Stainless Steel & Aluminum Alloy
200		50			
250		50			
300		50			
150		75			
200		75			
250		75			
300		75			
150		100			
200		100			
250		100			
300		100			
400		100			
450		100			
500		100			
600		100			
750		100			
900		100			
1000		100			
200		125			

W1	W2	H	Thickness	Radius	Finish
250	200 to 1000	125	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or Polyester Coated - Stainless Steel & Aluminum Alloy
300		125			
400		125			
450		125			
500		125			
600		125			
750		125			
900		125			
1000		125			
200		150			
250		150			
300		150			
400		150			
450		150			
500		150			
600		150			
750		150			
800		150			
900		150			
1000		150			

Dimension in Millimeter

Abbreviation : BRungSpacing

Finish : HDG Hot Dip Galvanized
SS Stainless Steel

H Height

PG Pre Galvanized
EP Epoxy Coated


R Radius

Al Aluminum Alloy
PC Polyester Coated

W Width



Equal Cross

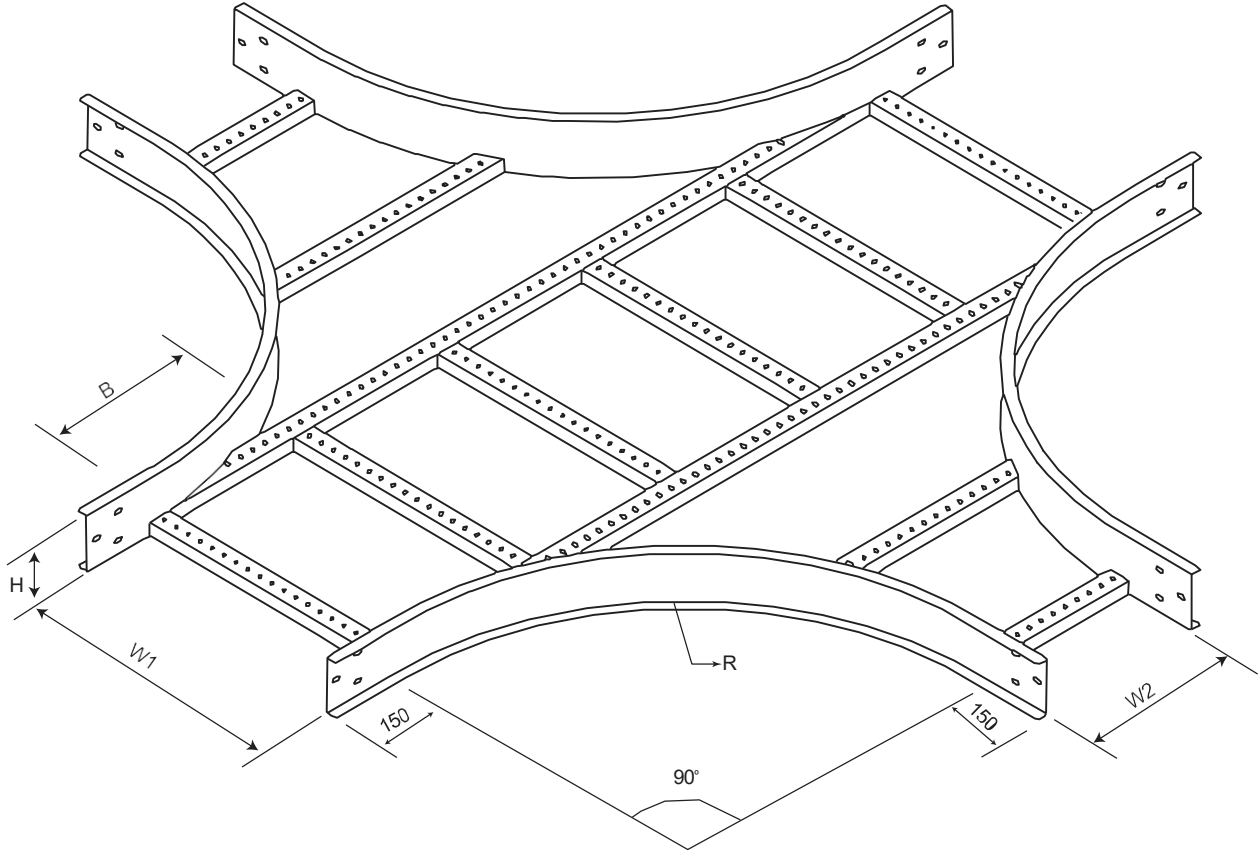

Rung Spacing 300mm

W1	W2	H	Thickness	Radius	Finish
150	150	50	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanized - Epoxy or Polyester Coated - Stainless Steel & Aluminum Alloy
200	200	50			
250	250	50			
300	300	50			
150	150	75			
200	200	75			
250	250	75			
300	300	75			
150	150	100			
200	200	100			
250	250	100			
300	300	100			
400	400	100			
450	450	100			
500	500	100			
600	600	100			
750	750	100			
900	900	100			
1000	1000	100			
150	150	125			

W1	W2	H	Thickness	Radius	Finish
250	250	125	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanized - Epoxy or Polyester Coated - Stainless Steel & Aluminum Alloy
300	300	125			
400	400	125			
450	450	125			
500	500	125			
600	600	125			
750	750	125			
900	900	125			
1000	1000	125			
200	200	150			
250	250	150			
300	300	150			
400	400	150			
450	450	150			
500	500	150			
600	600	150			
750	750	150			
800	800	150			
900	900	150			
1000	1000	150			

Dimension in Millimeter

Abbreviation : BRungSpacing

Finish : HDG Hot Dip Galvanized
SS Stainless Steel

H Height


PG Pre Galvanized
EP Epoxy Coated

R Radius

Al Aluminum Alloy
PC Polyester Coated

W Width



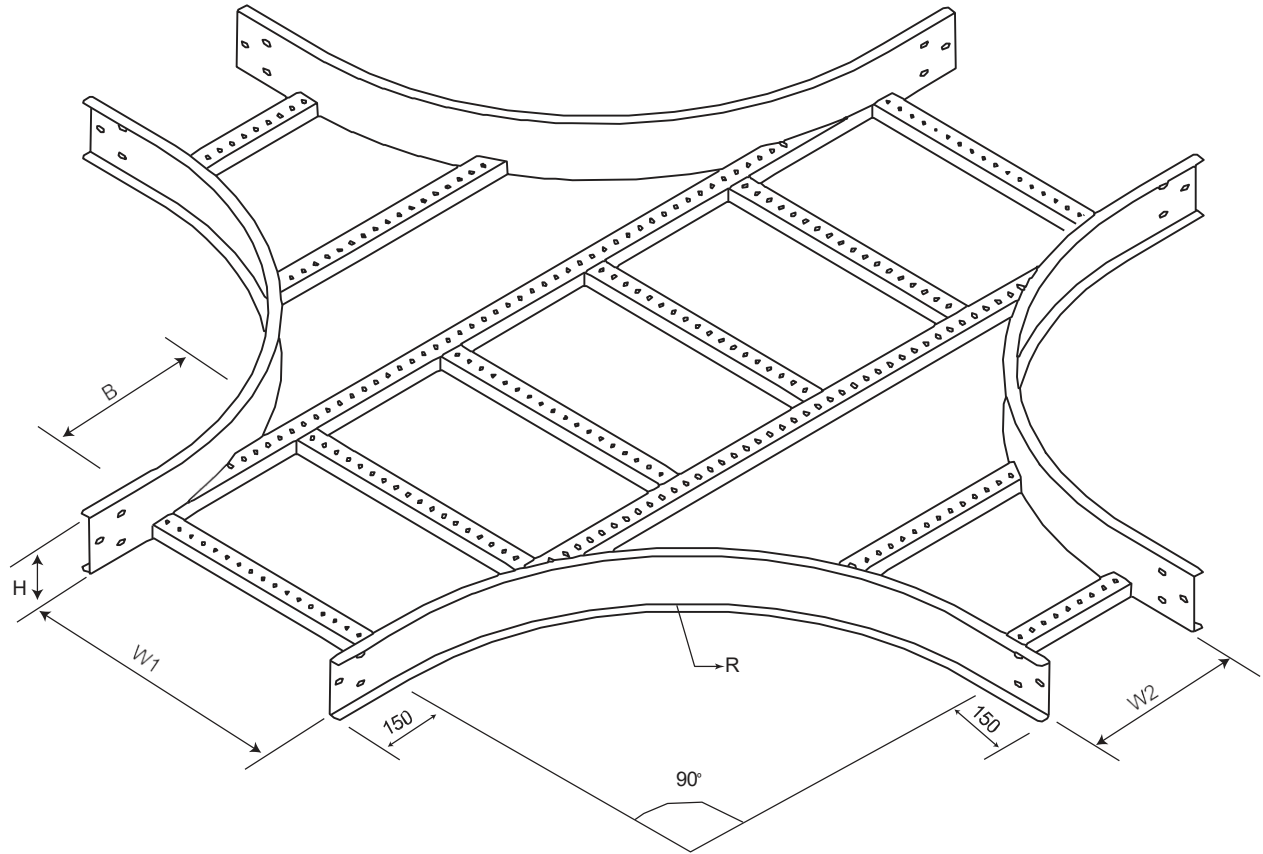

RungSpacing 300mm

W1	W2	H	Thickness	Radius	Finish
150	150	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
200	200	50			
250	250	50			
300	300	50			
150	150	75			
200	200	75			
250	250	75			
300	300	75			
150	150	100			
200	200	100			
250	250	100			
300	300	100			
400	400	100			
450	450	100			
500	500	100			
600	600	100			
750	750	100			
900	900	100			
1000	1000	100			
150	150	125			

W1	W2	H	Thickness	Radius	Finish
250	250	125	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
300	300	125			
400	400	125			
450	450	125			
500	500	125			
600	600	125			
750	750	125			
900	900	125			
1000	1000	125			
200	200	150			
250	250	150			
300	300	150			
400	400	150			
450	450	150			
500	500	150			
600	600	150			
750	750	150			
800	800	150			
900	900	150			
1000	1000	150			

Dimension in Millimeter

Abbreviation : B RungSpacing

Finish : HDG Hot Dip Galvanized
SS StainlessSteel

H Height

PG PreGalvanized
EP EpoxyCoated


R Radius

Al Aluminum Alloy
PC PolyesterCoated

W Width



External Riser

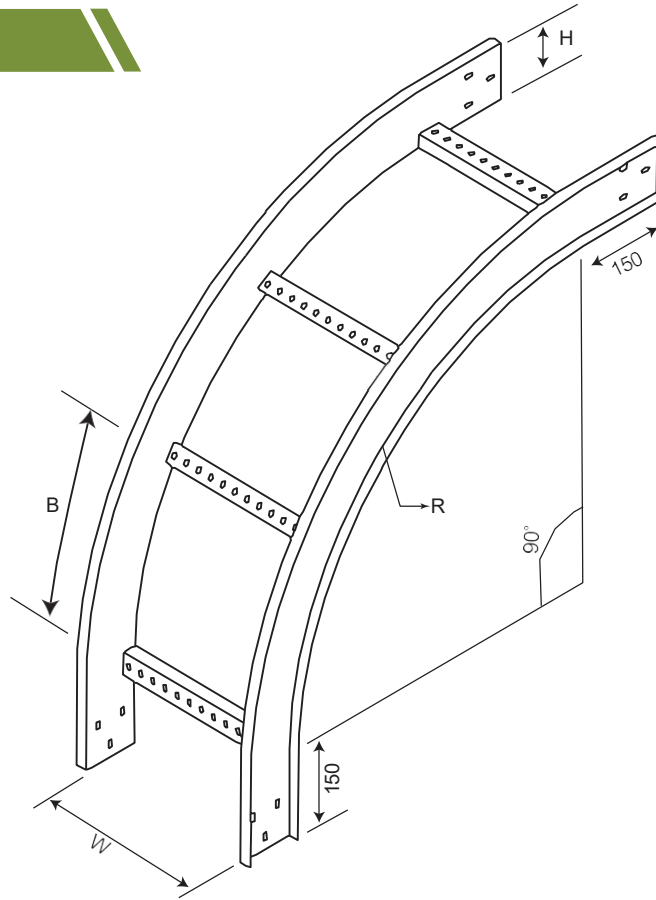

RungSpacing 300mm

W	H	Thickness	Radius	Finish
150	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
200	50			
250	50			
300	50			
150	75			
200	75			
250	75			
300	75			
150	100			
200	100			
250	100			
300	100			
400	100			
450	100			
500	100			
600	100			
750	100			
900	100			
1000	100			
200	125			

W	H	Thickness	Radius	Finish
250	125	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
300	125			
400	125			
450	125			
500	125			
600	125			
750	125			
900	125			
1000	125			
200	150			
250	150			
300	150			
400	150			
450	150			
500	150			
600	150			
750	150			
900	150			
1000	150			

Dimension in Millimeter

Abbreviation : BRungSpacing

Finish : HDGHot Dip Galvanized
SSStainlessSteel

HHeight

PGPreGalvanized
EPEpoxyCoated


RRadius

Al- Aluminum Alloy
PCPolyesterCoated

W-Width



Internal Riser

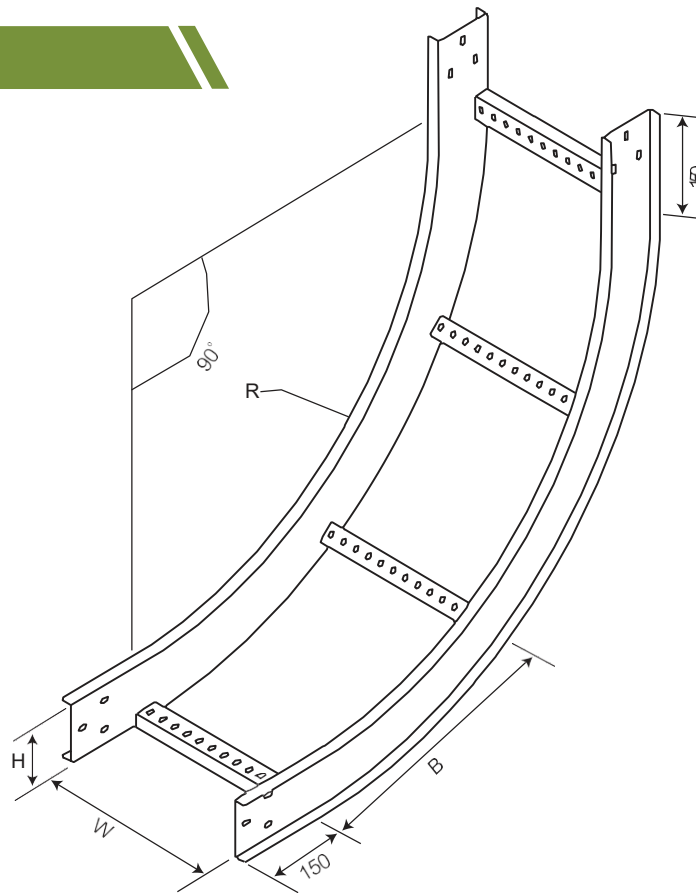

RungSpacing 300mm

W	H	Thickness	Radius	Finish
150	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized -Epoxyor PolyesterCoated -StainlessSteel & Aluminum Alloy
200	50			
250	50			
300	50			
150	75			
200	75			
250	75			
300	75			
150	100			
200	100			
250	100			
300	100			
400	100			
450	100			
500	100			
600	100			
750	100			
900	100			
1000	100			
200	125			

W	H	Thickness	Radius	Finish
250	125	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized -Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
300	125			
400	125			
450	125			
500	125			
600	125			
750	125			
900	125			
1000	125			
200	150			
250	150			
300	150			
400	150			
450	150			
500	150			
600	150			
750	150			
900	150			
1000	150			
200	125			

Dimension in Millimeter

Abbreviation : BRungSpacing
Finish : HDGHot Dip Galvanized
SSStainlessSteel


HHeight
PGPreGalvanized
EP-EpoxyCoated

RRadius
Al-Aluminum Alloy
PC-PolyesterCoated

W-Width



90° Vertical Tee

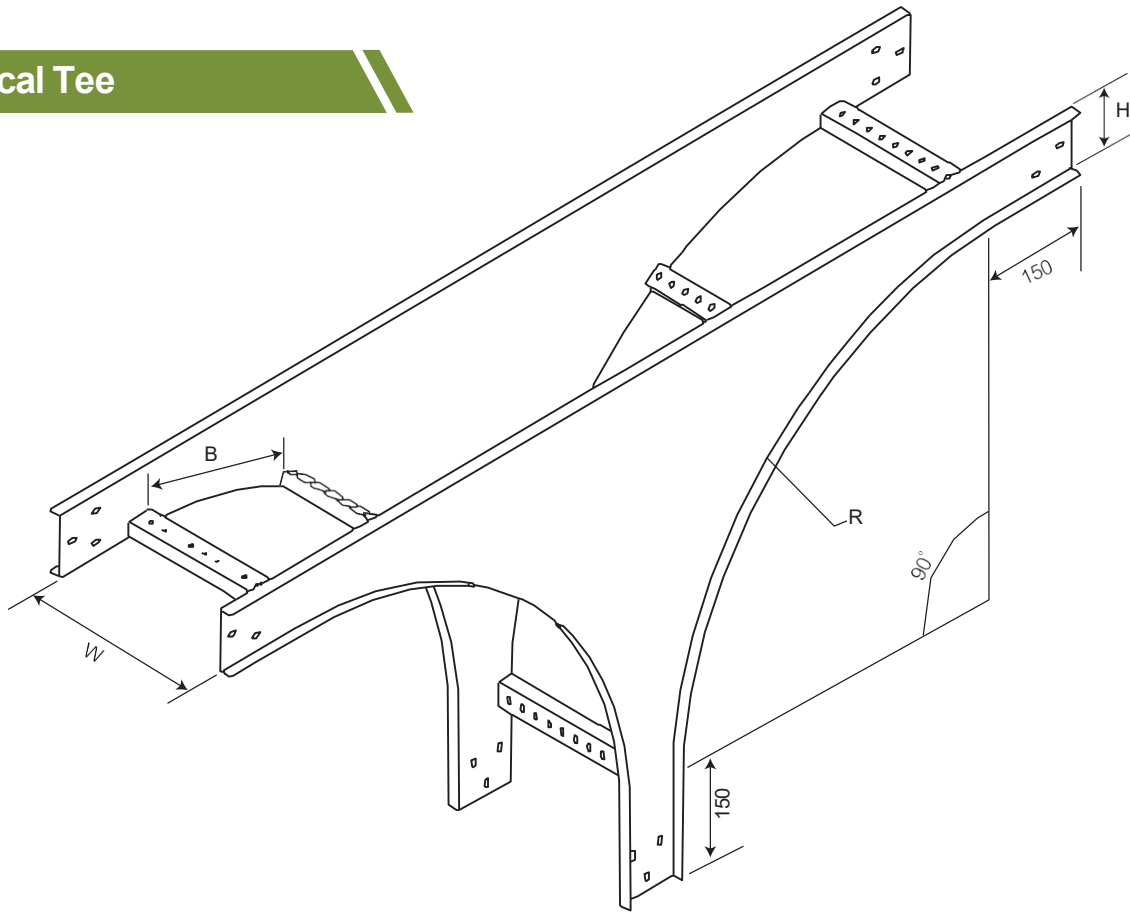

RungSpacing 300mm

W	H	Thickness	Radius	Finish
150	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized -Epoxy or PolyesterCoated -StainlessSteel &Aluminum Alloy
200	50			
250	50			
300	50			
150	75			
200	75			
250	75			
300	75			
150	100			
200	100			
250	100			
300	100			
400	100			
450	100			
500	100			
600	100			
750	100			
900	100			
1000	100			
200	125			

W	H	Thickness	Radius	Finish
250	125	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized -Epoxy or PolyesterCoated -StainlessSteel &Aluminum Alloy
300	125			
400	125			
450	125			
500	125			
600	125			
750	125			
900	125			
1000	125			
200	150			
250	150			
300	150			
400	150			
450	150			
500	150			
600	150			
750	150			
900	150			
1000	150			

Dimension in Millimeter

Abbreviation : BRungSpacing

Finish : HDGHot Dip Galvanized
SSStainlessSteel

HHeight

PGPreGalvanized
EPEpoxyCoated


RRadius

Al-Aluminum Alloy
PC-Polyester Coated

W-Width



Left Offset Reducer

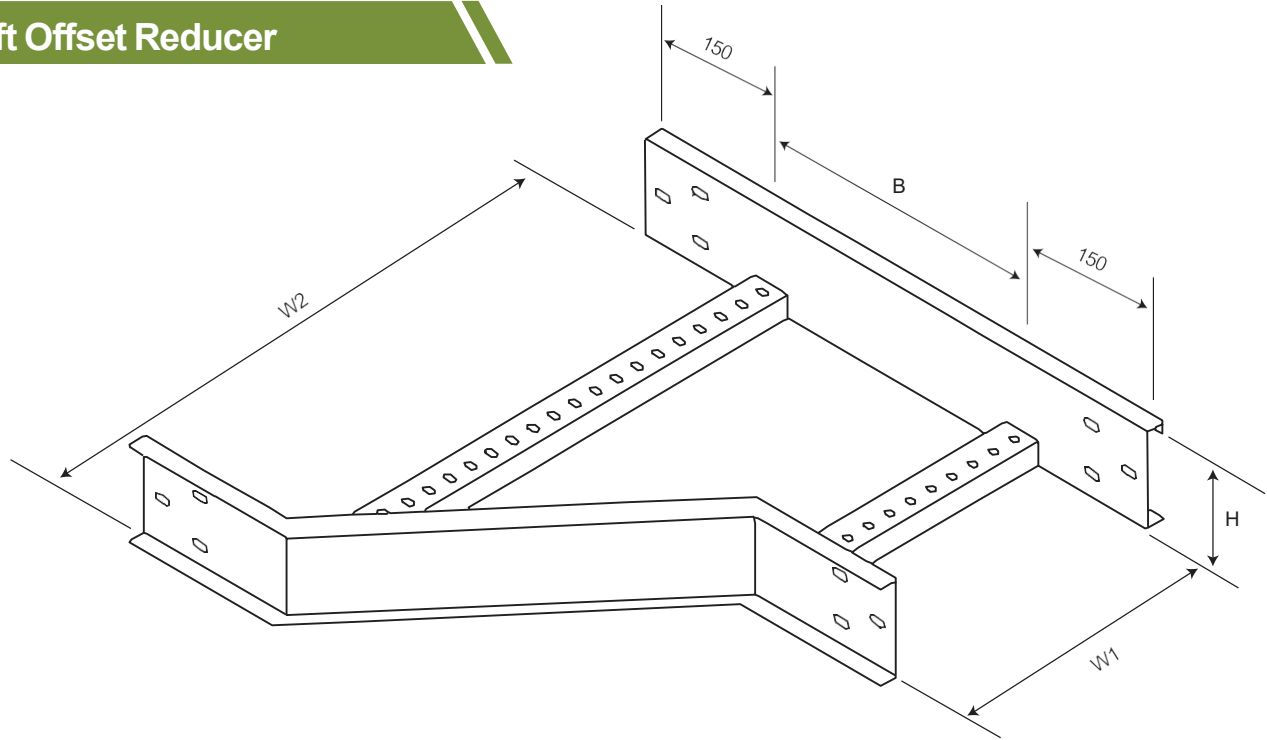

RungSpacing 300mm

W1	W2	H	Thickness	Radius	Finish
150	200 to 1000	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized -Epoxy or Polyester Coated -StainlessSteel & Aluminum Alloy
200		50			
250		50			
300		50			
150		75			
200		75			
250		75			
300		75			
150		100			
200		100			
250		100			
300		100			
400		100			
450		100			
500		100			
600		100			
750		100			
900		100			
1000		100			
200		125			

W1	W2	H	Thickness	Radius	Finish
250	200 to 1000	125	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized -Epoxy or Polyester Coated -StainlessSteel & Aluminum Alloy
300		125			
400		125			
450		125			
500		125			
600		125			
750		125			
900		125			
1000		125			
200		150			
250		150			
300		150			
400		150			
450		150			
500		150			
600		150			
750		150			
800		150			
900		150			
1000		150			

Dimension in Millimeter

Abbreviation : BRungSpacing

Finish : HDGHot Dip Galvanized
SSStainlessSteel

HHeight

PG-PreGalvanized
EP-EpoxyCoated


RRadius

Al-Aluminum Alloy
PC-PolyesterCoated

W-Width



Right Offset Reducer

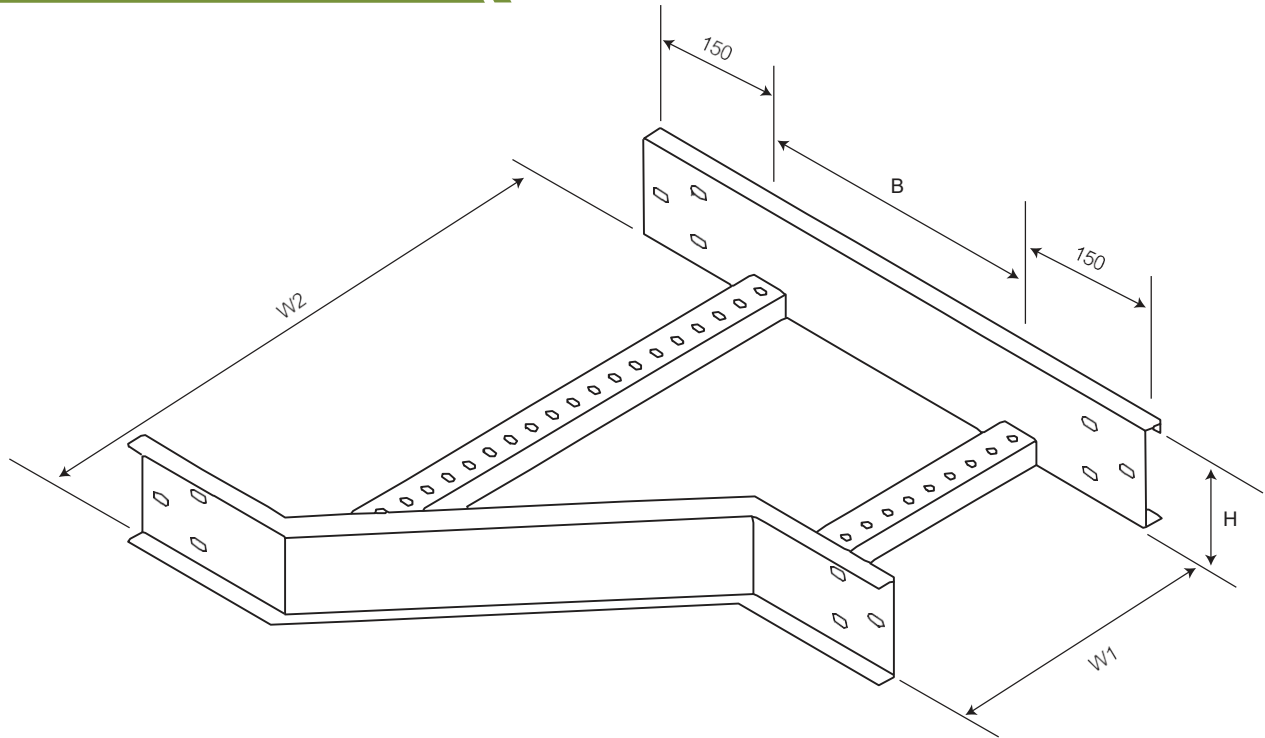

RungSpacing 300mm

W1	W2	H	Thickness	Radius	Finish
150	200 to 1000	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or PolyesterCoated -Stainless & Aluminum Alloy
200		50			
250		50			
300		50			
150		75			
200		75			
250		75			
300		75			
150		100			
200		100			
250		100			
300		100			
400		100			
450		100			
500		100			
600		100			
750		100			
900		100			
1000		100			
200		125			

W1	W2	H	Thickness	Radius	Finish
250	200 to 1000	125	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or PolyesterCoated -Stainless & Aluminum Alloy
300		125			
400		125			
450		125			
500		125			
600		125			
750		125			
900		125			
1000		125			
200		150			
250		150			
300		150			
400		150			
450		150			
500		150			
600		150			
750		150			
800		150			
900		150			
1000		150			

Dimension in Millimeter

Abbreviation : BRungSpacing

Finish : HDGHot Dip Galvanized
SSStainlessSteel

HHeight

PGPre Galvanized
EPEpoxy Coated


RRadius

Al-Aluminum Alloy
PC-Polyester Coated

W-Width



Straight Reducer

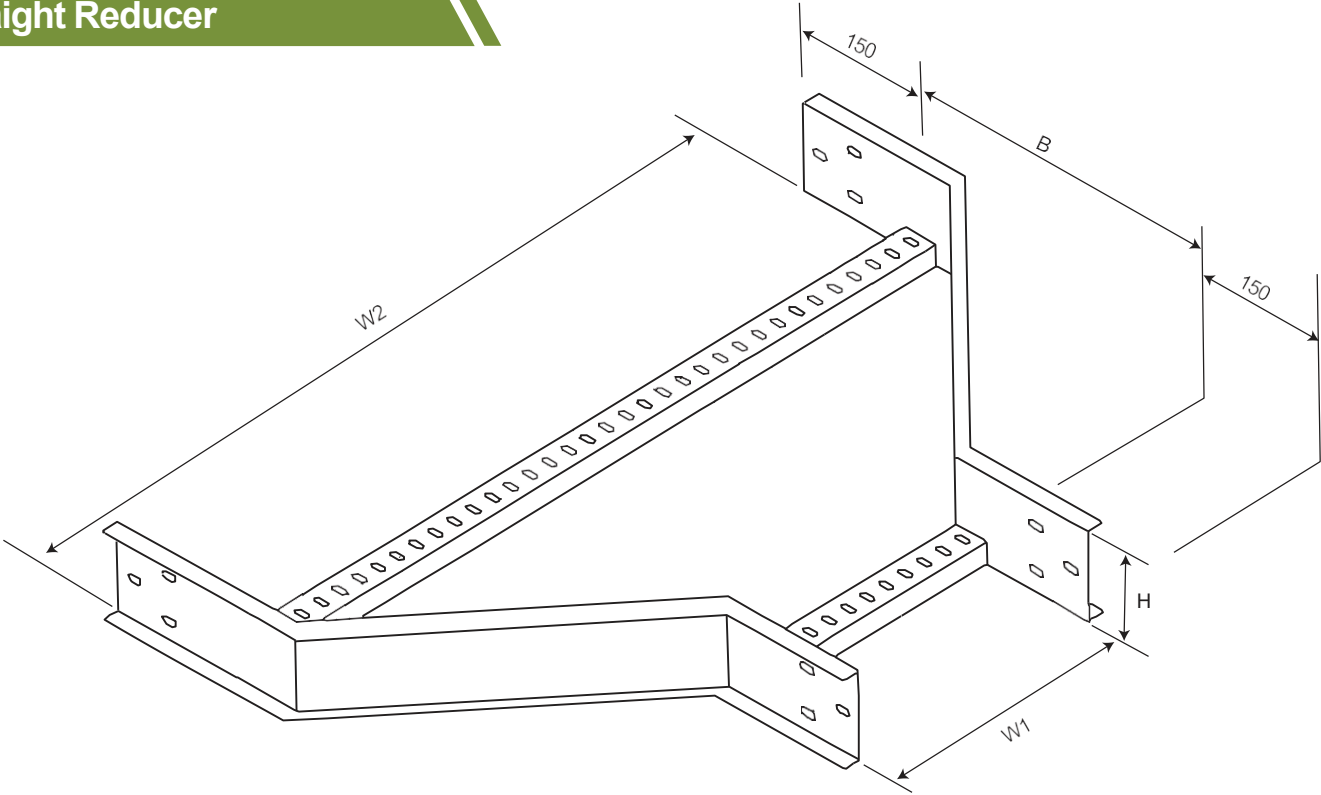

RungSpacing 300mm

W1	W2	H	Thickness	Radius	Finish
150	200 to 1000	50	AsStraight Cable Ladder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
200		50			
250		50			
300		50			
150		75			
200		75			
250		75			
300		75			
150		100			
200		100			
250		100			
300		100			
400		100			
450		100			
500		100			
600		100			
750		100			
900		100			
1000		100			
200		125			

W1	W2	H	Thickness	Radius	Finish
250	200 to 1000	125	AsStraight CableLadder	300 to 700 (StandardRadius450)	Hot Dip Galvanized - Epoxy or PolyesterCoated -StainlessSteel & Aluminum Alloy
300		125			
400		125			
450		125			
500		125			
600		125			
750		125			
900		125			
1000		125			
200		150			
250		150			
300		150			
400		150			
450		150			
500		150			
600		150			
750		150			
800		150			
900		150			
1000		150			

Dimension in Millimeter

Abbreviation : BRungSpacing
 Finish : HDGHot Dip Galvanized
 SSSStainlessSteel

HHeight
 PGPreGalvanized
 EPEpoxyCoated

LLength
 Al-Aluminum Alloy
 PC-PolyesterCoated


W-Width







CABLE TRUNKINGS

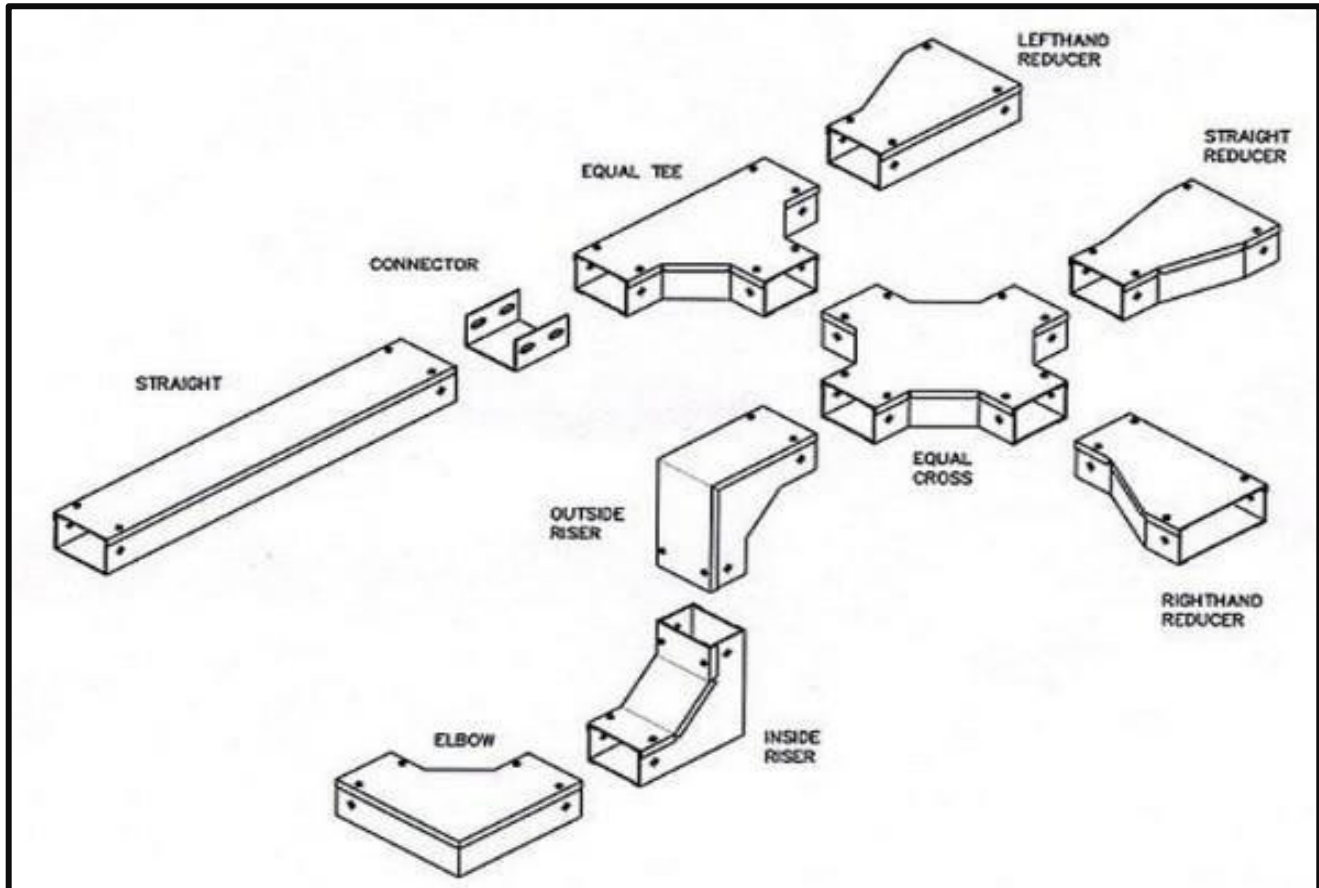

Straight sections of solid bottom cable trays constructed from single sheet of metal, providing excellent protection from external damage. They are used primarily for intrumental control, communication and other non-heat producing cables. For other dimensions please contact us.

STRAIGHT SECTION

STANDARD DIMENSIONS

- Length (L) 2.500mm & 3.000mm
- Depth (D) 50mm, 75mm, 85mm, 100mm, 150mm
- Width (W) 100mm, 150mm, 200mm, 300mm, 450mm, 600mm, 750mm
- Sheet Metal Thickness
 - 1.2mm for light loads (LL)
 - 1.5mm for medium loads (M)
 - 2.0mm for heavy loads (H)




HORIZONTAL TEE AND VERTICAL TEE

STANDARD DIMENSIONS

Radius R300mm

Width W (mm)	100	150	300	450	600	750	900
Length L (mm)	900	950	1100	1250	1400	1550	1700
Breadth B (mm)	500	550	700	850	1000	1150	1300

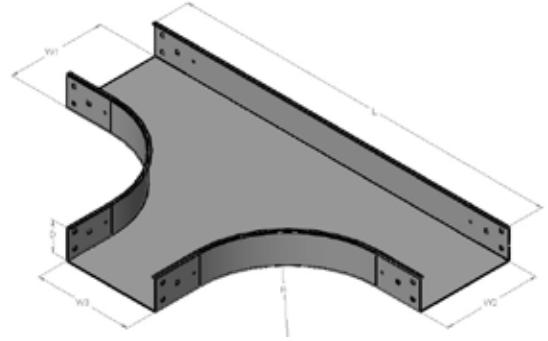


HORIZONTAL CROSS

STANDARD DIMENSIONS

Radius R 300mm

Width W (mm)	100	150	300	450	600	750
Length L (mm)	900	950	1100	1250	1400	1550

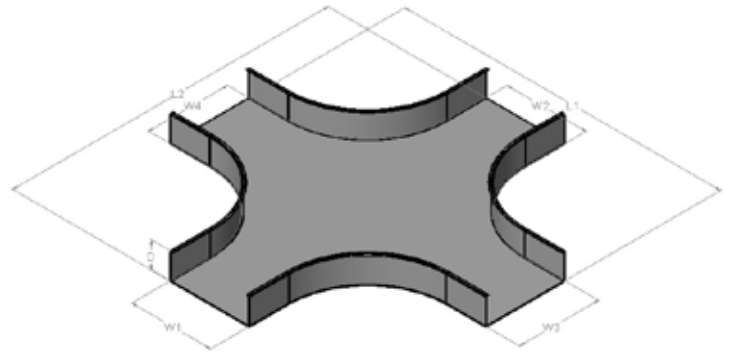


HORIZONTAL ELBOW

STANDARD DIMENSIONS


Radius R 300mm

Bend Angle 90° (30°, 45° & 60° also available)


Width W (mm)	100	150	300	450	600	750	900
Length L (mm)	500	550	700	850	1000	1550	1300
Breadth B (mm)	500	550	700	850	1000	1150	1300

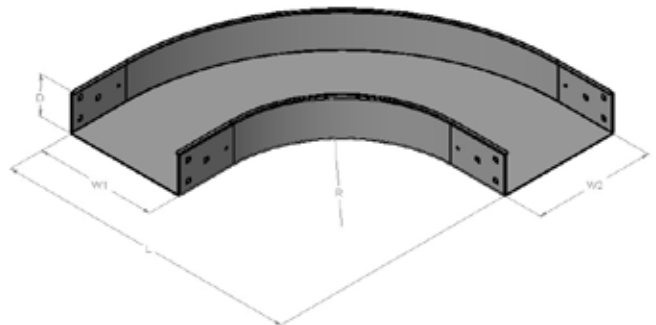


REDUCER

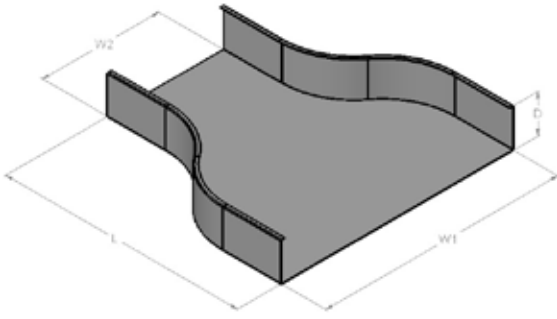


RIGHT HAND REDUCER

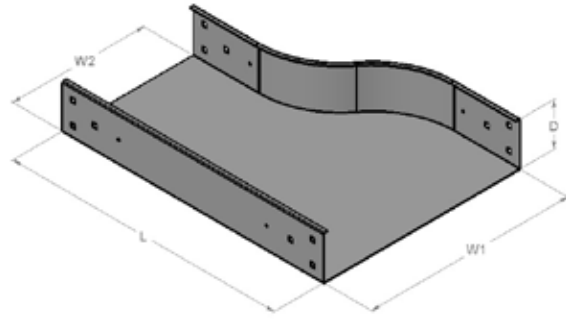


LEFT HAND REDUCER

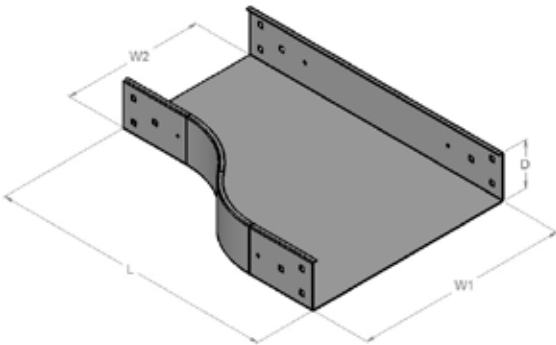


INSIDE VERTICAL RISERS

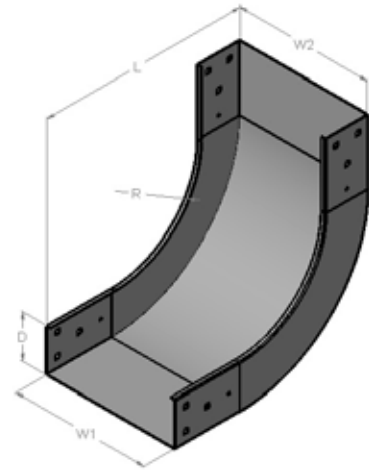


OUTSIDE VERTICAL RISERS

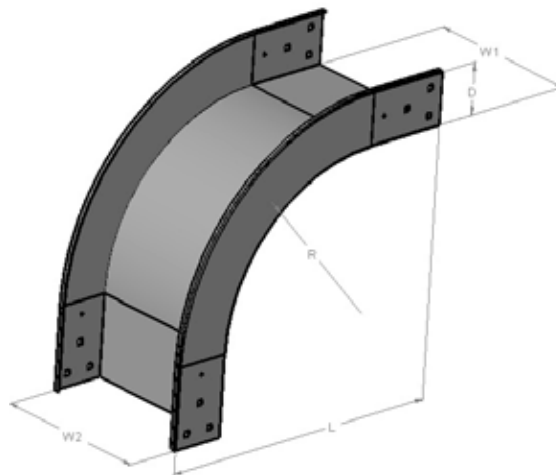

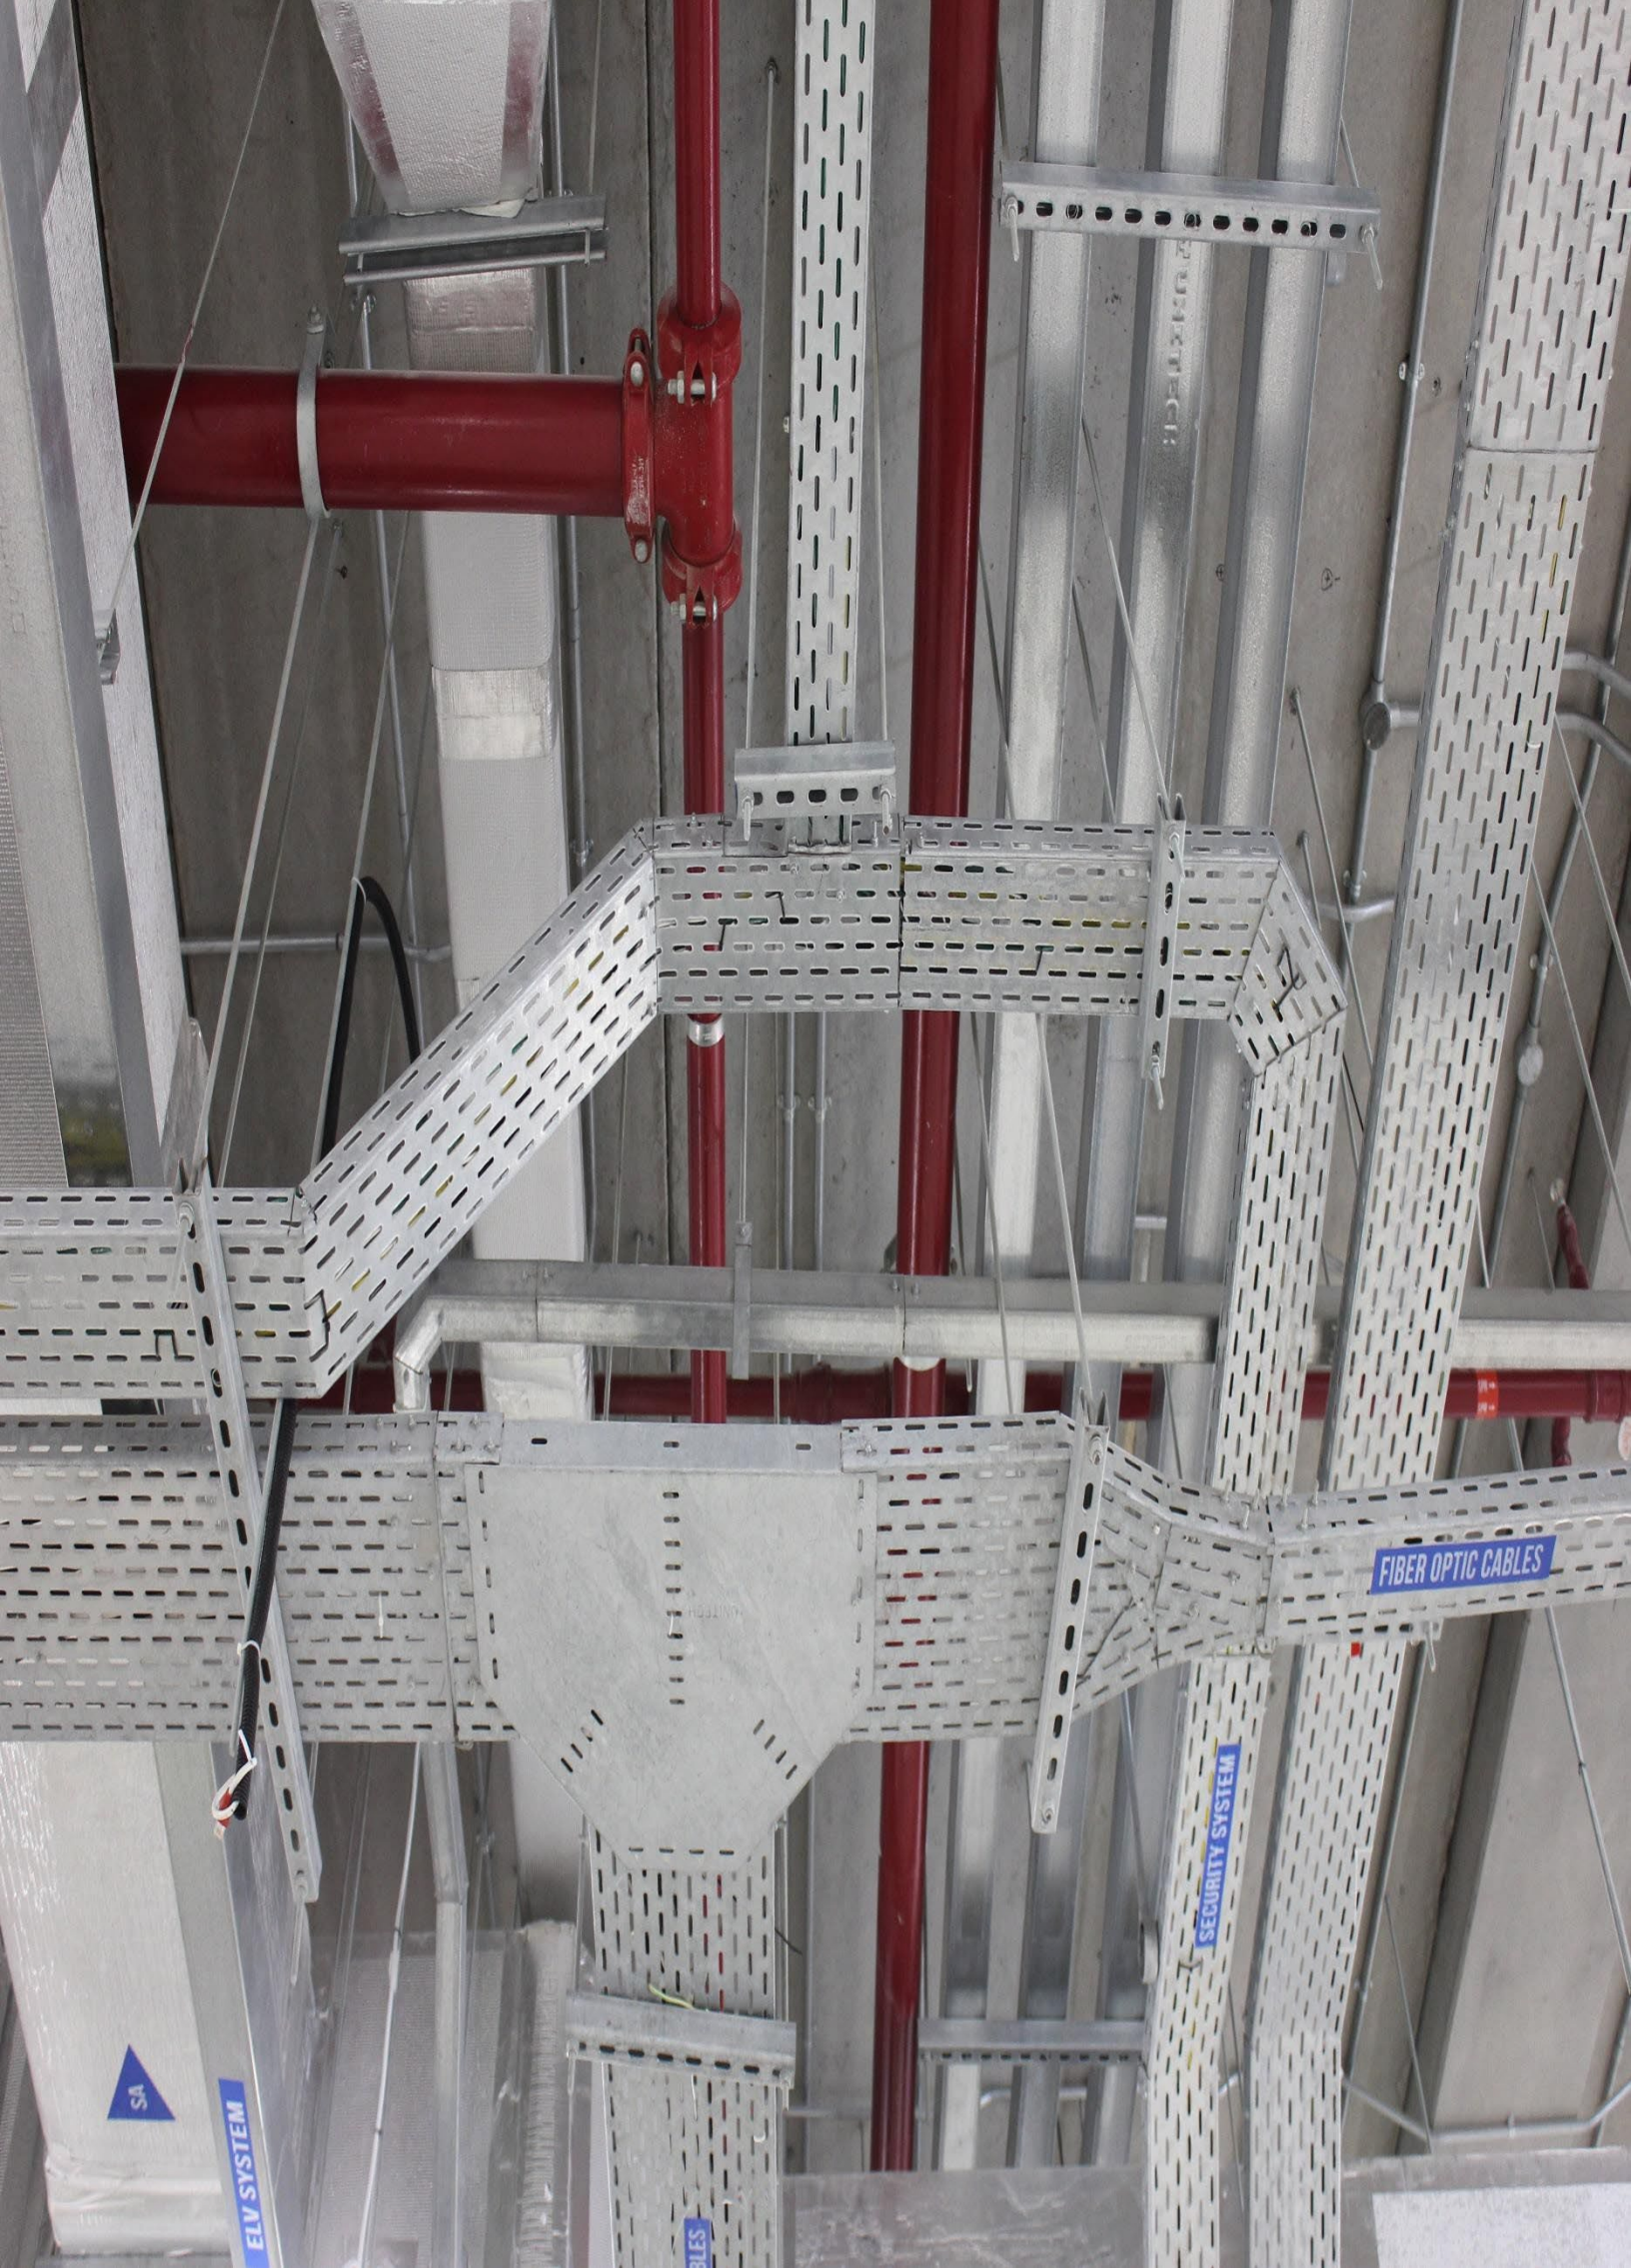

Cable Tray Covers

STRAIGHT SECTION

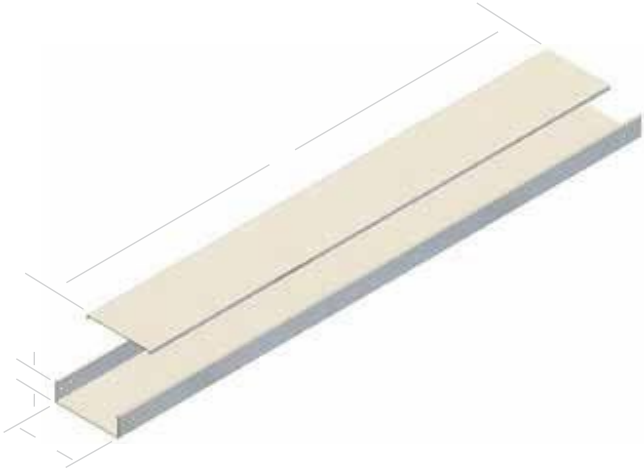


STANDARD DIMENSIONS

- Length (L) 2.500mm & 3.000mm
- Depth (D) 15mm
- Width (W) 100mm, 150mm, 200mm, 300mm, 450mm, 600mm, 750mm, 900mm
- Sheet Metal Thickness
 - 1.2mm (LL)
 - 1.5mm (M)
 - 2.0mm (H)

Designs other than those listed above can be manufactured to meet special requirements.

HORIZONTAL TEE

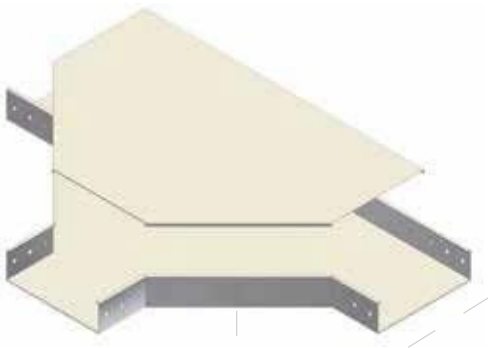

VERTICAL TEE



Cable Tray Covers


HORIZONTAL CROSS




HORIZONTAL ELBOW



REDUCER

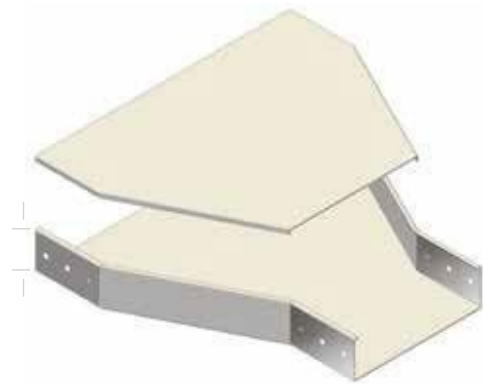


RIGHT HAND REDUCER

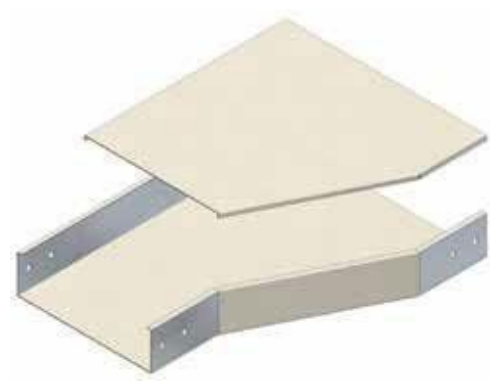

Cable Tray Covers

LEFT HAND REDUCER

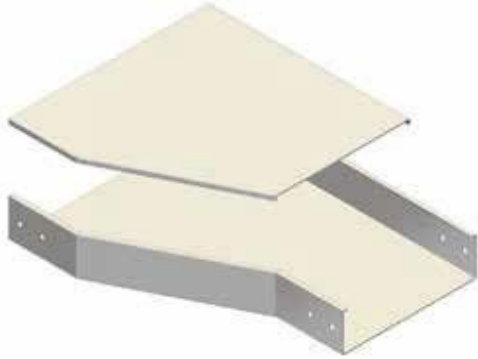

INSIDE VERTICAL RISERS



OUTSIDE VERTICAL RISERS






Cable Tray Accessories

CHANNEL

Channels are available in solid bottom and slotted type

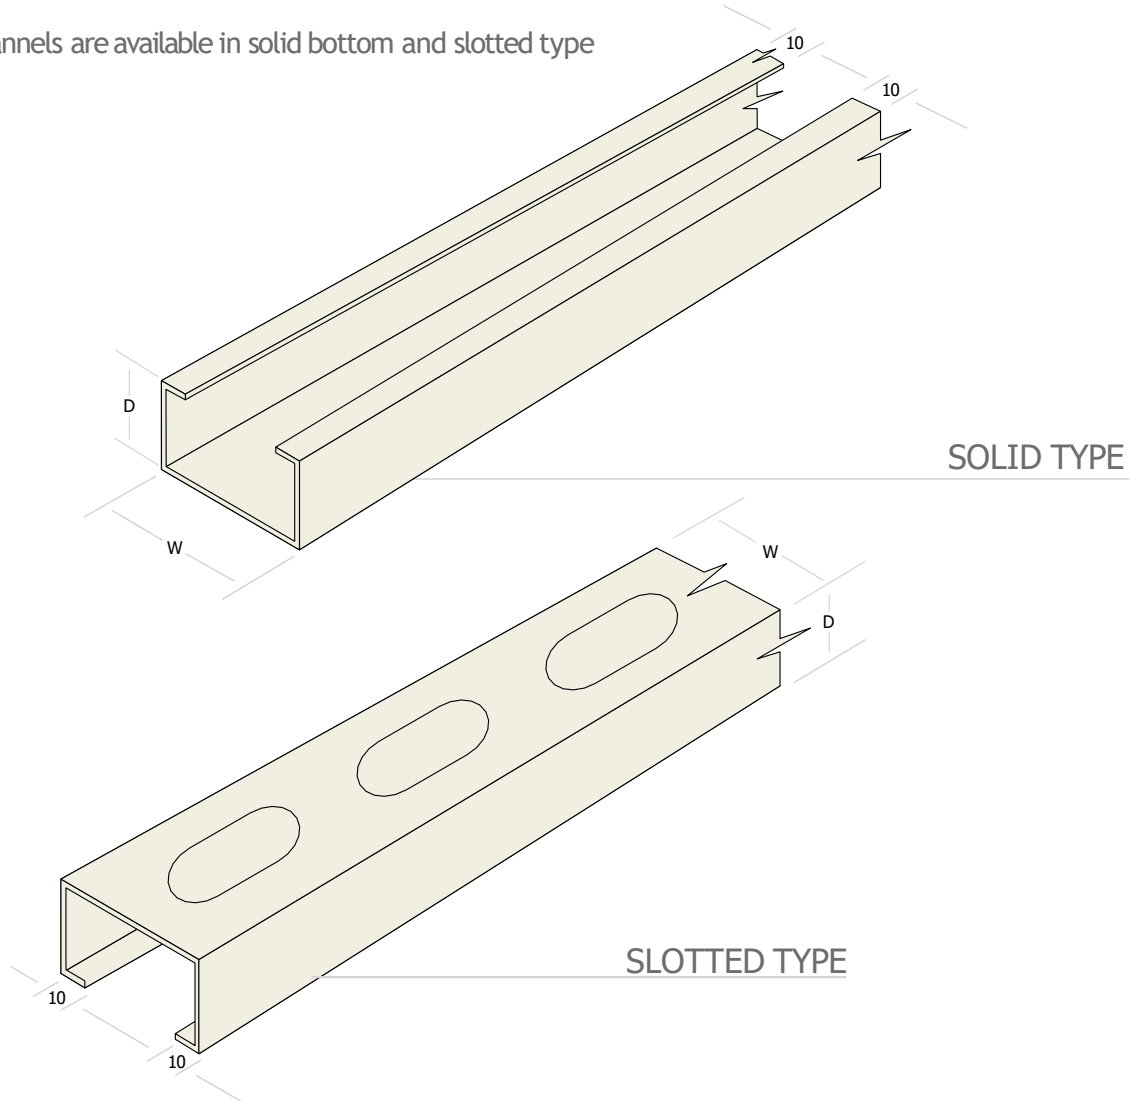

STANDARD DIMENSIONS


- Length (L) 2.500mm & 3.000mm
- Depth (D) 42mm
- Width (W) 42mm
- Sheet Metal Thickness 2.5mm

Designs other than those listed above can be manufactured to meet special requirements.



Cable Tray Accessories

SEPERATOR

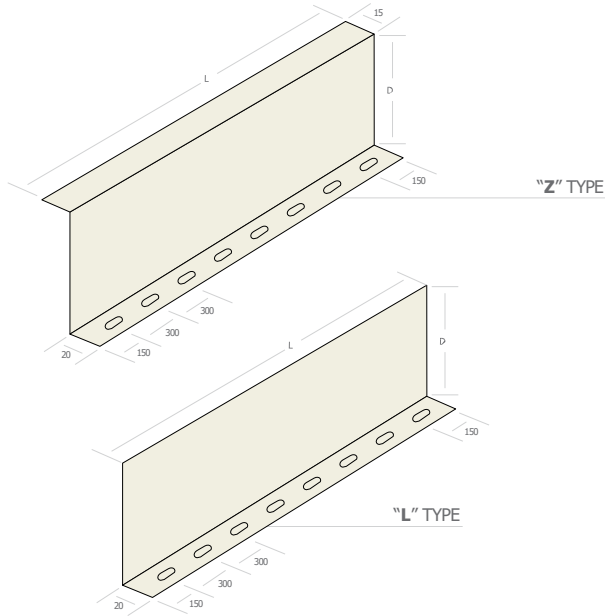


STANDARD DIMENSIONS

- Length (L) 2.500mm & 3.000mm
- Depth (D) According to tray depth
- Sheet Metal Thickness
 - 1.2mm (LL)
 - 1.5mm (M)
 - 2.0mm (H)

SIDE RAIL CLAMP

(for ladder cable tray)

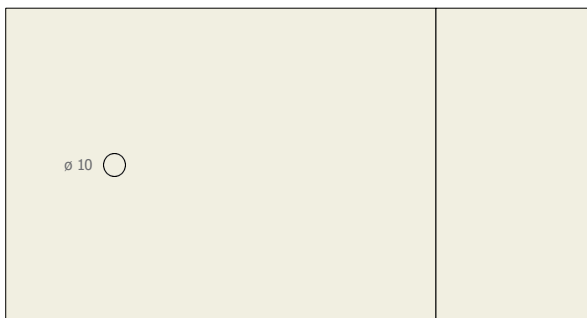


STANDARD DIMENSIONS

- Length (L) 60mm
- Width (W) 40mm
- Sheet Metal Thickness 3.0mm





Cable Tray Accessories



JOINING PLATE

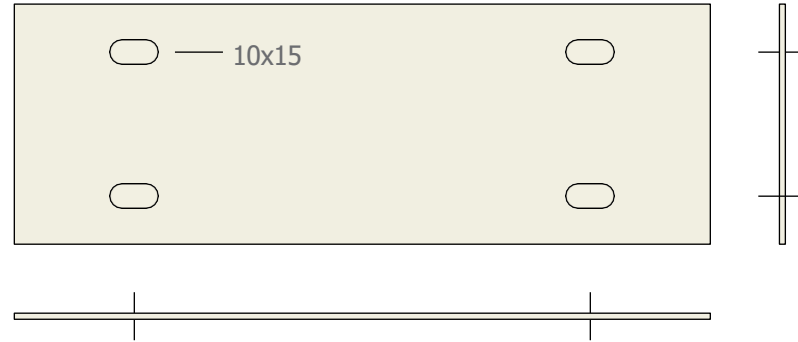

RECTILINEAR JOINT

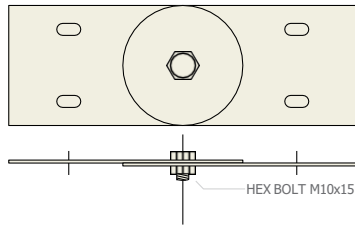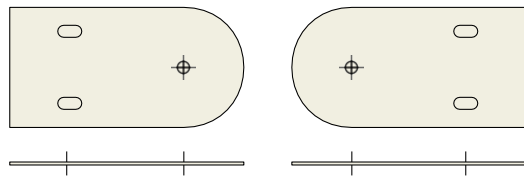

VERTICAL HINGED JOINT

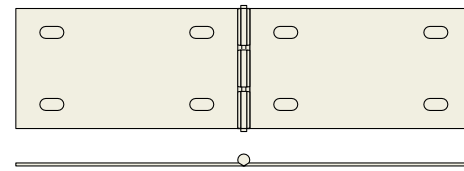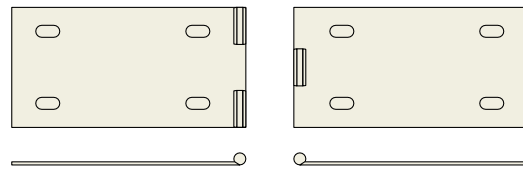

HORIZONTAL HINGED JOINT


STANDARD DIMENSIONS

- Length (L) 200mm
- Depth (D) According to tray depth
- Sheet Metal Asper tray thickness
Thickness



Cable Tray Accessories


BRACKET

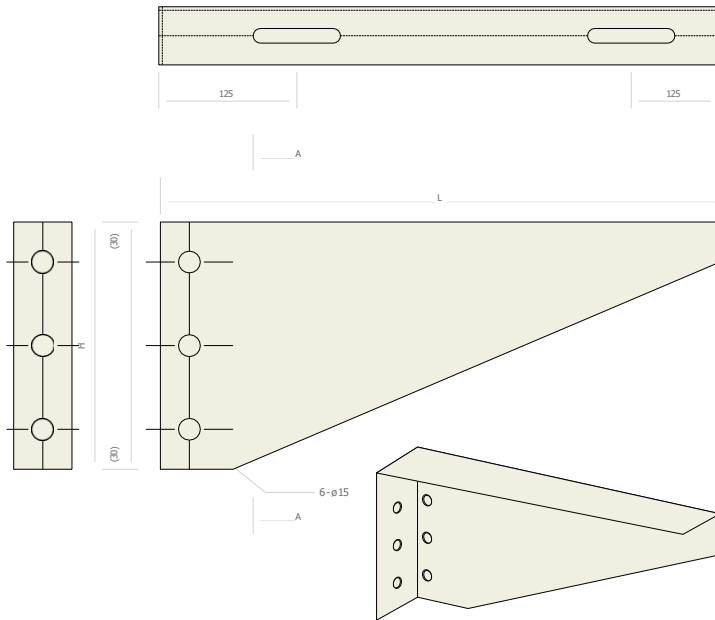

STANDARD DIMENSIONS

- Length (L) 200mm to 1.000mm
- Height 140mm, 180mm
- Sheet Metal Thickness 2.0mm, 2.5mm, 3.2mm

END CAP

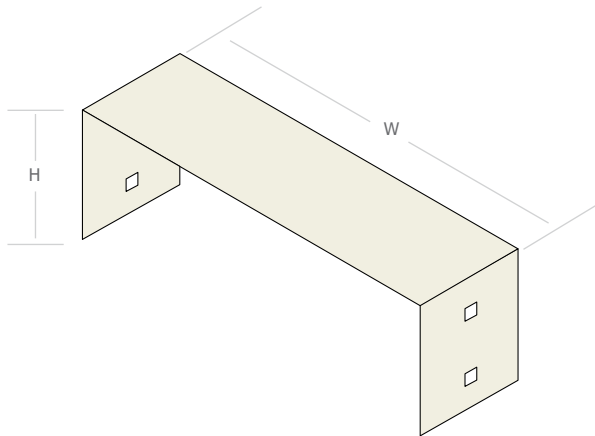


STANDARD DIMENSIONS

- Length (L) 200mm to 1.000mm
- Height 85mm to 300mm
- Sheet Metal Thickness 1.2mm to 3.2mm



Cable Tray Accessories


HANGER POST

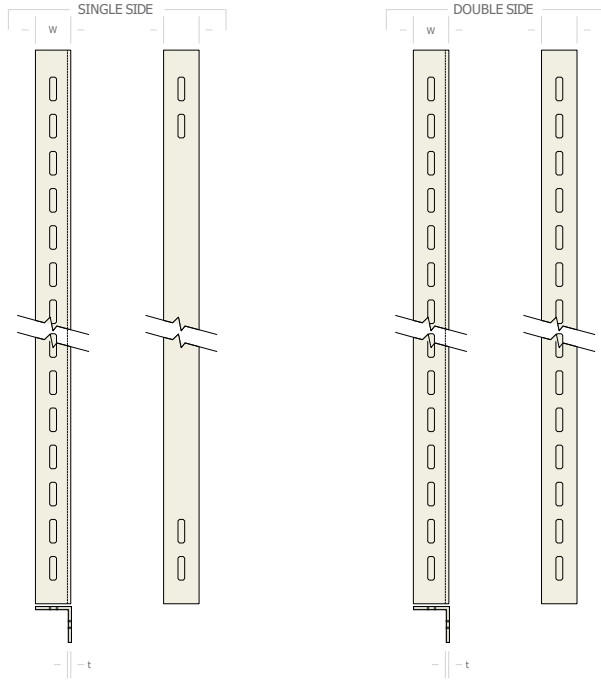

STANDARD DIMENSIONS

- Length (L) 600mm to 6.000mm
- Standard size of Angle Iron
 - 2.0mm
 - 2.5mm
 - 3.2mm
- Thickness 4mm to 9mm

HEAD PLATE

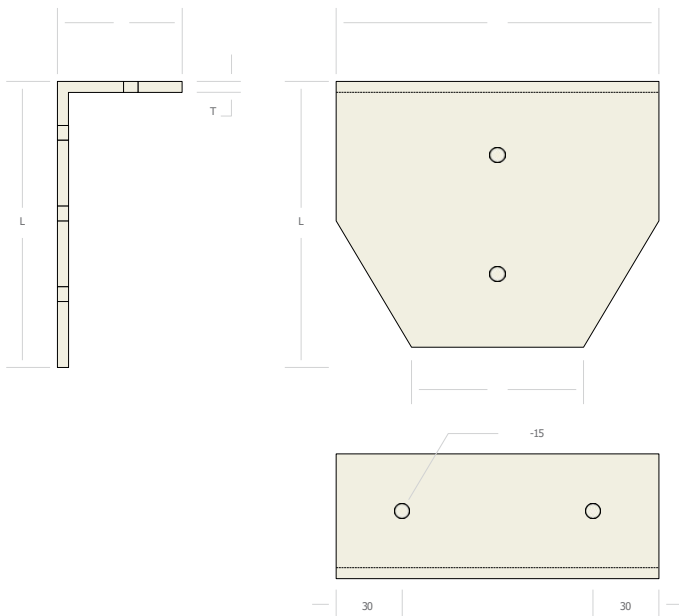


STANDARD DIMENSIONS

- Length (L) 130mm
- Width (W) 150mm
- Sheet Metal Thickness
 - 6mm & 8mm




Cable Tray Accessories

NUTS, BOLTS & WASHERS




THREADED ROD




ORDINARY NUT




WASHER



SPRINGNUT




SQUARE NUT




HEXBOLT



NUT WITHOUT SPING



SQUARE NUT



NECK BOLT

STANDARD DIMENSIONS

- M6
- M8
- M10
- M12
- M14

Other thickness available on request







CASK STEEL
A DIVISION OF CASK INDUSTRIES

CONTACT US

We are committed to providing high quality solutions and reliable support. Get in touch with us for any inquiries, technical assistance or partnership opportunities.



ADDRESS

Cerkesli mah Tavsancil sok no 72
Dilovasi Kocaeli, Turkey



PHONE

Turkey: +905525204010



EMAIL

steel@cask-industries.com



WEBSITE

www.cask-industries.com

SMART SOLUTIONS.
STRONGER INFRASTRUCTURE.



HIGH QUALITY
MATERIALS



ENGINEERED
SOLUTIONS



COMPLIANCE
WITH STANDARDS



RELIABLE
PARTNER



BUILT TO SUPPORT.
DESIGNED TO PERFORM.